


## **Datasheet**

# R15-000-PL-PF-NL

Plastic Access Panel



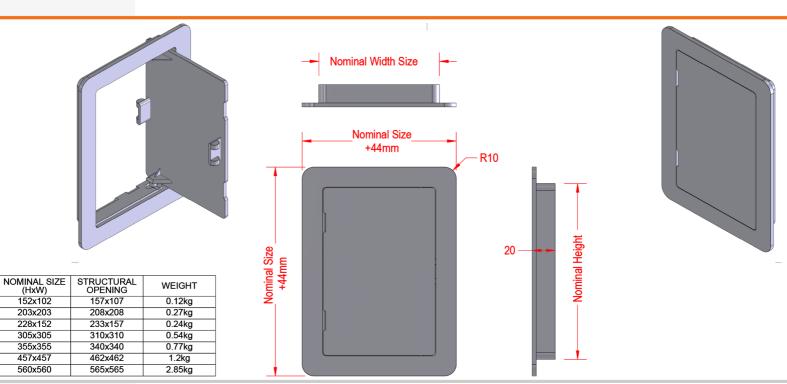

Walls Only



No Airtight Rating



No Acoustic Rating



No Fire Rating



# Description

The R15-000-PL-PF-NL Plastic range of Access Panels are simple to install and suitable for walls where regular maintenance to services is required or simply used to fill unsightly holes, saving the need for expensive repairs.

### Construction

Manufactured from 3mm thick high impact styrene plastic with U.V stabilizers which will not fade or corrode and a white textured surface to allow for painting over. The flush plastic door has a picture frame detail with a simple pin hinge to allow the door to be completely removed. Opened using a coin or flat head screwdriver.

## Tests

The Panel is not Fire Rated.

The Panel is not Acoustic rated.

The Panel is not Air Pressure tested.

The Panel is not Smoke Tested.

#### Seals

Draught Seals NO, Smoke Seals NO, Air Seals NO, Acoustic Seals NO, Intumescent Seals NO

# Sizes

152x102mm 203x203mm 228x152mm 305x305mm 355x355mm 457x457mm

#### Fitting

Please note that on installation of the access panel, the actual size of the structural opening in the wall needs to be 5mm larger than the overall panel size eg. Structural opening for  $152 \times 102$  would need to be  $157 \times 107$  (See sizes above).

Either glue in place using a suitable adhesive or screw fix through the upstand of the frame into a prepared timber / steel lined opening ensuring the frame is pushed up against the structural opening surround.