


Divoroll Elite 200 2S

Divoroll Elite 200 2S is a 4 layer LR vapour permeable membrane with a reinforced grid that can be used without eaves ventilation when used with a well sealed ceiling and high level ventilation.

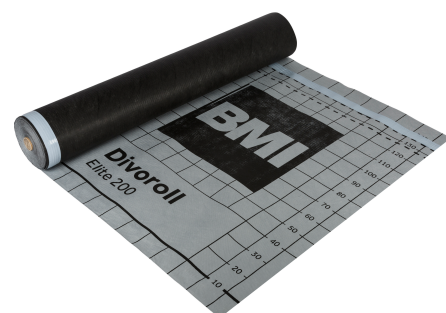

PRODUCT DATA	Test Method	Value
Weight		195g/m ²
Roll size		50m x 1.5m (75m ²)
Rolls per Pallet		12 rolls
Roll weight		15kg
Reaction to fire	EN13859-1/ EN13859-2	Class E
Resistance to water penetration		W1
Tensile Strength Longitudinal N/50mm		500 ± 30
Tensile Strength Transverse N/50mm		480 ± 30
Resistance to tearing (nail shank) longitude		400 ± 30 N
Resistance to tearing (nail shank) transverse		400 ± 30 N
Water Vapour Transmission Sd/m		0.03 ± 0.015
Water column		3000 mm

PRODUCT CODES

UNDERLAY

Divoroll Elite 200 2S	9157
-----------------------	------

ASSOCIATED PRODUCTS

BMI Redland Underlay support tray
BMI Redland Dry ridge systems

KEY FEATURES

- Covered by BMI Redland Specmaster guarantee when used in Specmaster projects
- 2 integral tapes so does not require overlap batten (cost saving)
- Can be used without eaves ventilation when used in conjunction with a well sealed ceiling and high level ventilation
- Suitable for use in all wind zones in line with BS5534 2014
- Provides a wind tight sealed roof system for both warm and hybrid roofs improving energy efficiency