

The Low-Profile Multi-Flash Master Flash®

Specifically designed for **Sidewall or Low Profile Retrofit Applications**

Advanced Ozone Resistance tested to...		EPDM 70 hour @ 500 pphm	HIGH TEMP FDA SILICONE 70 hour @ 500 pphm
High Temperature Resistance Tested to	Intermittent	+135°C (+275°F)	+260°C (+500°F)
	Continuous	+100°C (+212°F)	+225°C (+437°F)
Low Temperature Resistance tested to...		-55°C (-67°F)	-74°C (-101°F)
Compression Set Maximum...		25%	50%

*Complete specification data and testing methods are available upon request.

Applications:

**Drywall • Sidewall Applications • Stucco Walls
Corrugated Metal Sides • Roof Penetrations**


Available in:

**Three EPDM colors Black, Dark Gray, Light Gray and in
FDA High Temp White Silicone**

Weather Protection

Made of EPDM or FDA High Temp White Silicone,

These flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.

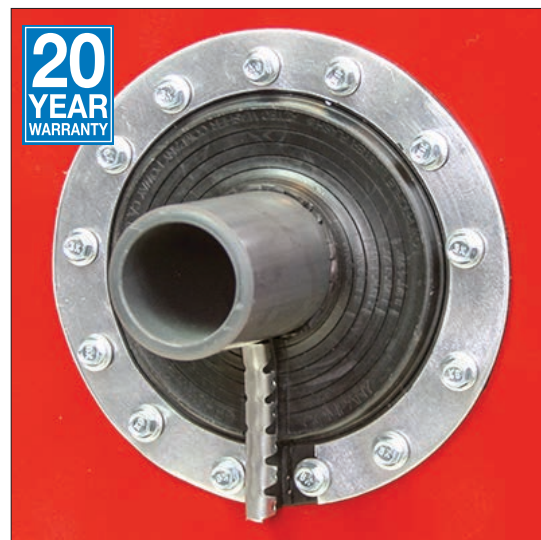

**20
YEAR
WARRANTY**

Pipe diameters can be seen clearly for proper fitting.

Sleeve flexibility

Sleeve flexibility absorbs vibration and movement caused by expansion/contraction.


For retrofit applications these flashings were designed to seal existing pipes/vents that requires a wrap-around existing or hard to reach installation

Stainless Steel Gripper for Retrofit Applications Included

**Now Available
in 3 Sizes**

Adaptable Base

The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.



Low-Profile Flashing Details

	A-Pipe Range	Closed
#1	A-Pipe Range	Closed -3-3/4" (0-95mm)
	B-Overall Height	5/16" (8mm)
	C-Base	6-1/4" (158mm)
#2	A-Pipe Range	Closed- 8" (0-203mm)
	B-Overall Height	5/16" (8mm)
	C-Base	10-3/4" (273mm)
#3	A-Pipe Range	Closed-12-1/2" (0-318mm)
	B-Overall Height	5/16" (8mm)
	C-Base	16-1/2" (419mm)