

# Manthorpe Building Products

**Product Information Sheet** 

## **Cross Flow Fly Screen Eaves Panel Ventilator**

### CODE **G405**

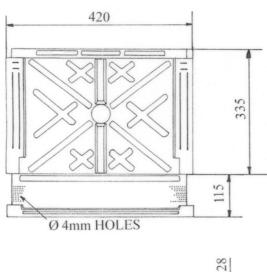



4000mm<sup>2</sup> AIRFLOW PER PANEL

#### **Description:**

The G405 Cross Flow Fly Screen Panel is designed for open eaves or cottage style situations and to provide a clear air passage between the roof felt and loft insulation.


The fly screen section consists of evenly punched holes specifically designed to prohibit the entrance of large insects but wide enough not to be blocked by debris, paint or water droplets (see BS5250 section 6) The G405 is suitable for 400mm rafter centres

450mm and 600mm versions are also available.

COLOURS	Black
PACKING DETAILS	50 Panels per box
WEIGHT	5kg per box
MATERIAL	Lightweight Rigid PVC
MANUFACTURING PROCESS	Vacuum Formed
FREE AIRFLOW	10,000mm²/M equivalent to a continuous gap of 10mm

MANTHORPE BUILDING PRODUCTS LTD MANTHORPE HOUSE **BRITTAIN DRIVE** CODNOR GATE BUSINESS PARK **RIPI FY** DERBYSHIRE DE5 3ND

TEL: 01773 514 200 FAX: 01773 514 262 EMAIL: sales@manthorpe.co.uk WEB: www.manthorpe.co.uk

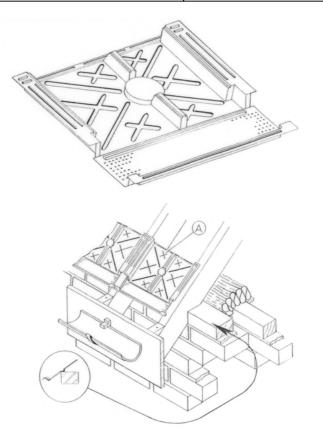

#### **Fitting Instructions:**

The G450ross Flow Eaves Panel (A) should be positioned with its lower edge over lapping the wall plate and either nailed or stapled through the side fixing wings to the rafters ensuring that the loft insulation is firmly tucked into the eaves and around the wall plate as shown.

In certain low pitch situations two Cross Flow Eaves Panels will be required to ensure a clear air path over the insulation into the roof space. Use in conjunction with other products from the Manthorpe range to provide a complete roof ventilation system.

#### **References:**

DRN M.A

without notice.

BRE: BSI: DOE: NHBC: NHBC: **DIGEST 262/270** BS5250 **Building Regs F2** Good Practice Guide Standards 7.2

DRN M.A	Date 01.08.03	DRG No	Issue
The company m of continuous de product range ar right to amend th	evelopment of its nd reserves the	MBP 8018	A