
Manthorpe Building Products

Product Information Sheet

Cross Flow Fly Screen Eaves Panel Ventilator

CODE **G625**



15,000mm² AIRFLOW PER PANEL

Description:

The G625 Cross Flow Fly Screen Panel is designed for open eaves or cottage style situations and to provide a clear air passage between the roofs felt and loft insulation.


The fly screen section consists of evenly punched slots specifically designed to prohibit entrance of large insects but wide enough not to be blocked by debris, paint or water droplets (see BS5250 section 6)

The G625 is suitable for 600mm rafter centres and where 25mm of airflow is required.

COLOURS	Black		
PACKING DETAILS	50 Panels per box		
WEIGHT	9.6kg per box		
MATERIAL	Lightweight Rigid PVC		
MANUFACTURING PROCESS	Vacuum Formed		
FREE AIRFLOW	25,000mm²/M equivalent to a		
	continuous gap of 25mm		

MANTHORPE BU MANTHORPE HO **BRITTAIN DRIVE** CODNOR GATE E RIPLEY DERBYSHIRE

TEL: 01773 514 200
FAX: 01773 514 262
EMAIL:
sales@manthorpe.co.uk
WEB:
www.manthorpe.co.uk

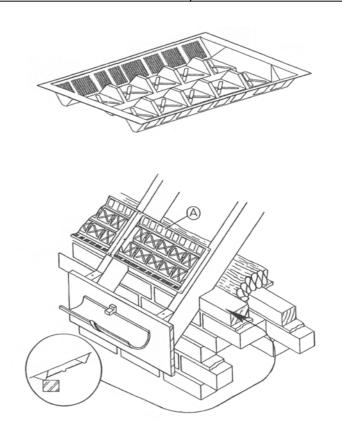

Fitting Instructions:

The G625 Cross Flow Fly Screen Eaves Panel (A) should be positioned with the section over lapping the external brick course and either nailed or stapled to the rafters ensuring that the loft insulation is firmly tucked into the eaves as shown.

In certain low pitch situations an additional G500 Roll Panel will be required to ensure a clear air path over the insulation into the roof space.

Use in conjunction with other products from the Manthorpe range to provide a complete roof ventilation system.

References:

BRE:	DIGEST 262/270
BSI:	BS5250
DOE:	Building Regs F2
NHBC:	Good Practice Guide
NHBC:	Standards 7.2

UILDING PRODUCTS LTD OUSE	TEL: 01773 514 200 FAX: 01773 514 262	DRN M.A	Date 01.08.03	DRG No	Issue	
BUSINESS PARK DE5 3ND	EMAIL: sales@manthorpe.co.uk WEB: www.manthorpe.co.uk	The company may of continuous de product range ar right to amend th without notice.	evelopment of its nd reserves the	MBP 8021	A	