


### Push Up Loft Access Door



CODE **GL260**

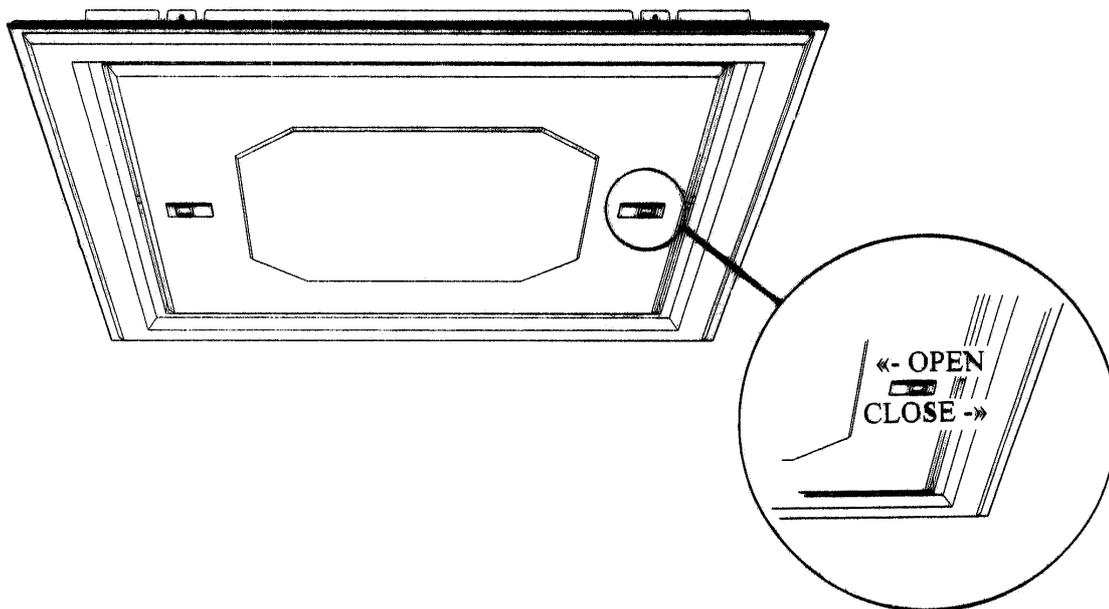

#### Operating Instructions:

To open the door, simply pull the two locking catches in towards the centre of the door to release from the frame. Push the door upwards into the loft space and place to one side for unrestricted access alternatively the door can be totally removed if required.

To replace the door position over the opening ensuring the catches are in line with the locking apertures in the frame. With the catches still pushed into the centre of the door allow the door to be lowered back into the frame. Check the door is correctly positioned and aligned in the frame and push the locking catches outwards to lock the door into position as shown.

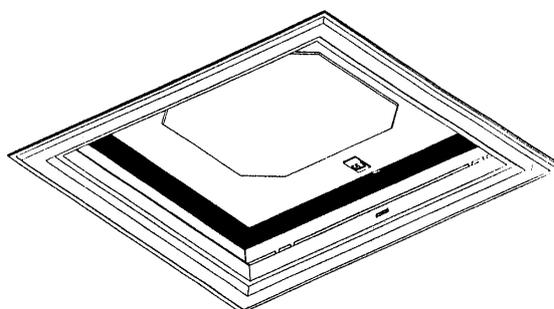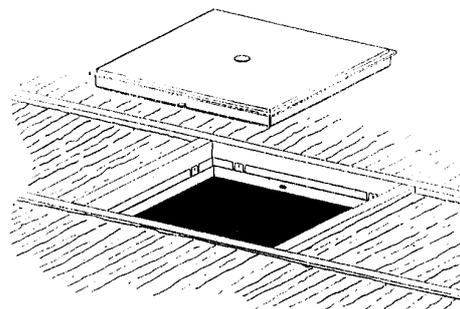

#### References:

BRE:	DIGEST 262/270
BSI:	BS5250
DOE:	Building Regs L1
NHBC:	Good Practice Guide
NHBC:	Standards 7.2

MANTHORPE BUILDING PRODUCTS LTD  
 MANTHORPE HOUSE  
 BRITAIN DRIVE  
 CODNOR GATE BUSINESS PARK  
 RIPLEY  
 DERBYSHIRE DE5 3ND

TEL: 01773 303 000  
 FAX: 01773 303 300  
 EMAIL: [customercare@manthorpebp.co.uk](mailto:customercare@manthorpebp.co.uk)  
 WEB: [www.manthorpebp.co.uk](http://www.manthorpebp.co.uk)

DRN M.L.W.O Date 20.06.19

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No  
**MBP 8030**

Issue

**B**