



SlotDrain Junction Unit


CODE GPDST-JU





118mm



118mm



148mm

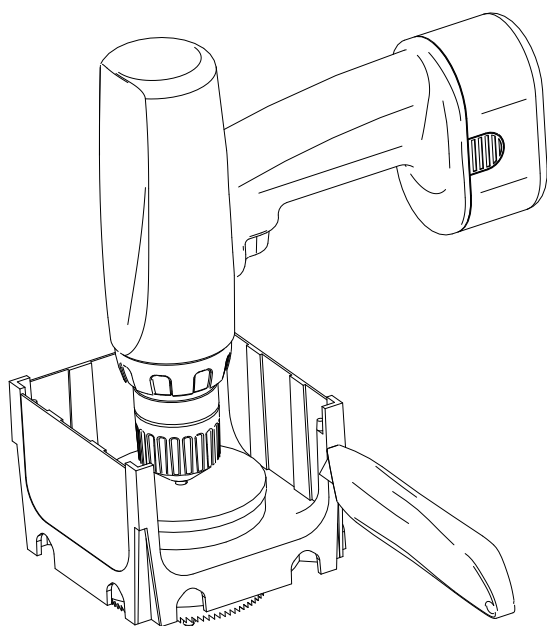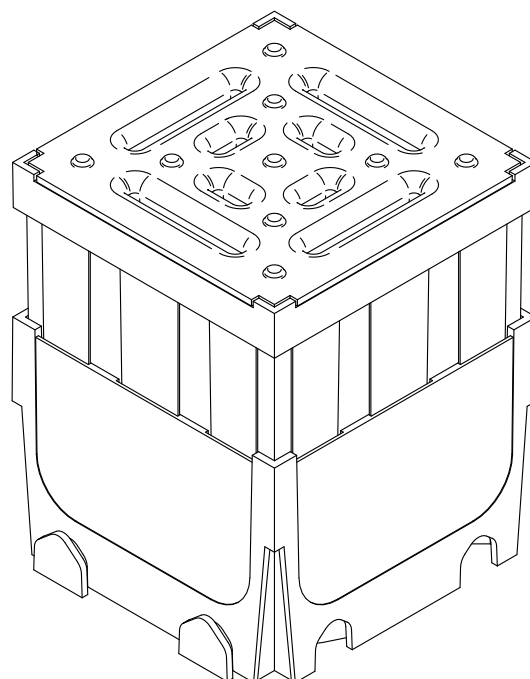

Description

The SlotDrain Junction Unit is made up of 3 components; a channel base, an extension piece and a grate lid. A SlotDrain Junction Unit should be placed at each end of a SlotDrain run and longer runs should include a Junction Unit at 3m intervals to allow access for rodding and cleaning. The SlotDrain Junction Unit can also be used for creating 90° corners, T-junctions and 4-way junctions. The relevant thinned out sides need to be removed before use which can easily be done with a utility knife. Fig. A shows how the base of the unit can be cut out using an 80mm dia. hole saw. There is a drill centre point located on the base to aid cutting, after which a leaf trap can be placed in the hole and using the circular ribs to locate a 4" underground drain pipe, the unit can be used as an outlet.

Packaging	6 per box
Weight	2.0kg per box
Colour	Black
Material	Polypropylene
Manufacturing Process	Injection moulded

MANTHORPE BUILDING PRODUCTS LTD
MANTHORPE HOUSE
BRITAIN DRIVE
CODNOR GATE BUSINESS PARK
RIPLEY
DERBYSHIRE DE5 3ND

TEL: 01773 303 000
FAX: 01773 303 300
EMAIL:
customer@manthorpebp.co.uk
WEB
www.manthorpebp.co.uk

DRN M.R Date 19.06.19

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No

MBP 8287

Issue

B