manthorpe building products

Product Information Sheet

100x150mm Access Panel

CODE **GL50**

DRY-LINE MATERIAL

ADHESIVE BEDDING
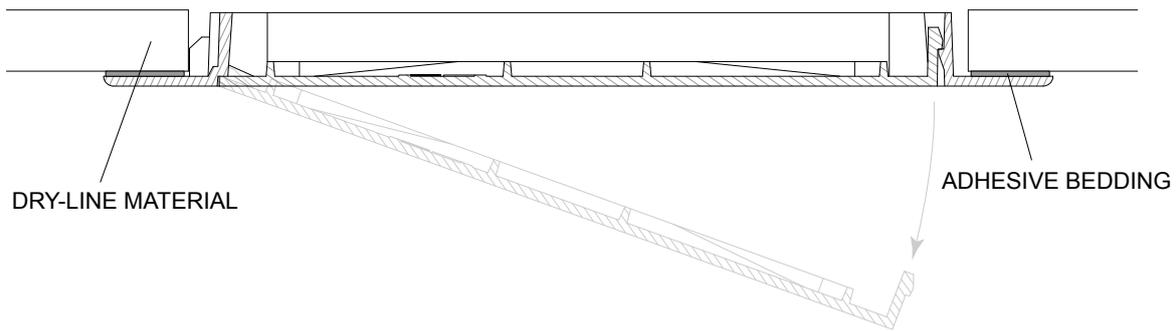
Installation:

To install, prepare a 106mm x 152mm hole. Run a bead of a suitable adhesive all around the back edge of the frame. With the door securely fastened within the frame, insert the whole panel into the previously prepared hole and press firmly against the surface of the wall. Remove any excess adhesive which has seeped from behind the frame and leave to set.
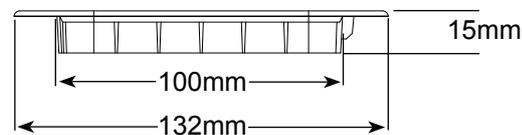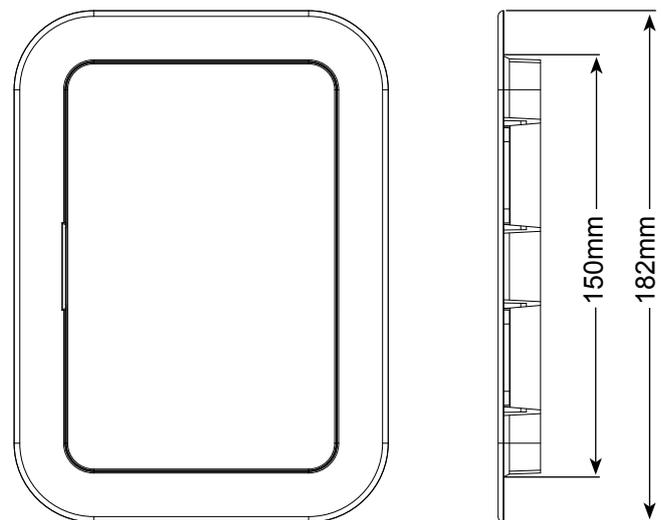
Description:

The GL50 Access Panel Provides a cost effective solution for easy access to hidden building services behind a ceiling or wall. The panel is predominantly used in domestic household situations for access to:-

Electrical Wiring Systems
Fuse Boxes / Switches
Controls / Connection Links
Valves / Stopcocks / Plumbing

The product is lightweight, easy to fit and is manufactured in High Impact Polystyrene. This allows a textured finish that can be painted over if required.

The GL50 door is hinged along one side and can be completely removed for easy and convenient access.

150mm
182mm

100mm
132mm
15mm

PACKING DETAILS	Packed in boxes of 20
MATERIAL	High Impact Polystyrene
WEIGHT	0.067kg
COLOUR	White