

Ref. Code: AP102

Date: May 2025



Corolux Wall Flashing

3" ASB, Mini, and Cast Iron Profiles

Product Description

Corolux Wall Flashings are used to weather Corolux roofing sheet to a wall. The corrugations of the wall flashing fit directly over the corrugations of the roofing sheet, being fixed into place using the Corolux fixings as per the fixing pattern appropriate for the roofing sheet. The flat back-board of the Wall Flashing is weathered to the wall using lead or butyl flashing, lead or suitable flashband. The Wall Flashing is flexible to suit different pitches or roof.

Material


PVC

Colour

Transparent

Dimensions

The Corolux Wall Flashing is available to suit three different corrugated roofing sheet profiles:

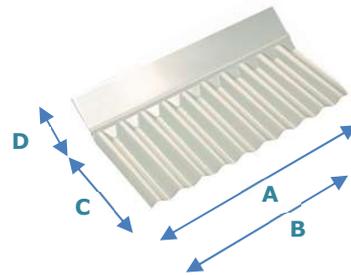

	3" ASB	Mini	Cast Iron
Product Code	37001	37002	39010
Length (A)	695mm	710mm	710mm
Cover Length (B)	584mm	651mm	666mm
Corrugated Edge to Fold Distance (C)	135mm	135mm	135mm
Flat Edge to Fold Distance (D)	70mm	70mm	70mm
Item Weight	0.150kg	0.150kg	0.150kg