




Corolite CS Corrugated Polycarbonate

Product

- High optical clarity
- Exceptional impact resistance
- Lightweight
- Sheet will soften and open when fire is beneath allowing smoke and heat to escape
- 10 year light transmission and 3 year weather breakage warranty
- 0.8mm and 1mm thick
- Available in 2 profiles

Installation

- Make allowance for thermal movement
- Holes drilled for fixings must be oversized
- Sheet lengths must be limited to ensure there is no excessive movement at the end laps
- Stable for prolonged service in temperatures ranging from -20°C to 100°C
- **Light transmission** - Clear 88% DIN 5036
- **Sheet weight** - 1.2kg/m²
- **U-value** - 5.72 W/m²K (1mm)
- **Fire performance** - please contact the Technical department for the most up to date certification

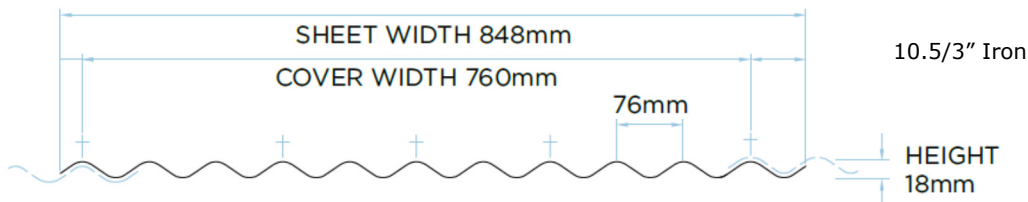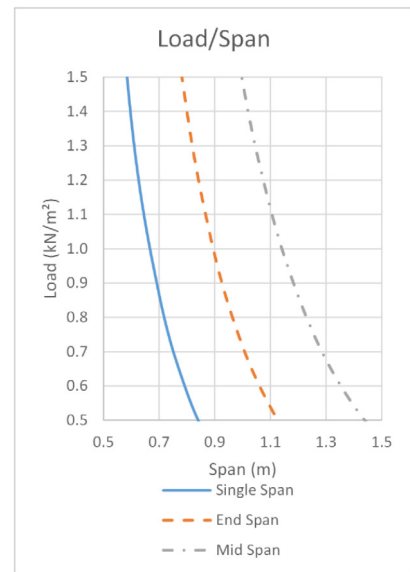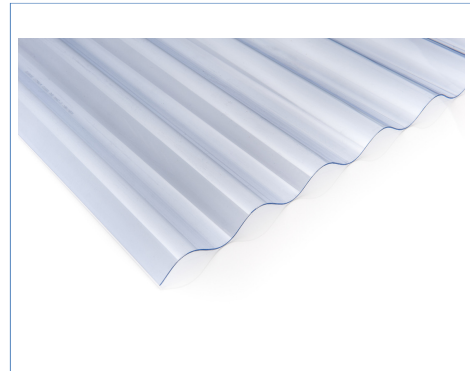

Greca