



Installation Guide BIRD NETTING



Bird Netting is one of the most popular methods used for protecting structures against all common species of urban bird pests.

Its success is due principally to the fact that, if it is installed correctly then it is virtually the only system that can be used with confidence in places subject to high levels of bird infestation and where birds are roosting at night.

Bird netting is very versatile as it can be used at all angles for proofing a wide variety of structures, from small perches to complete building facades and roofs.

The square mesh running horizontally and vertically ensures that the netting is virtually invisible when installed correctly.

The bird netting is completely humane and cannot physically harm the birds in any way. It simply deters them so they move on to perch somewhere else.

All of our nets come in stock sizes available for next working day delivery or may be cut to size to the nearest square metre. Cut to size nets will take 4 working days to dispatch.



Our knotted bird nettings are available in different mesh sizes according to the target species.

Mesh Sizes:


- 75mm - Seagulls
- 50mm - Pigeons
- 40mm - Pheasants
- 28mm - Starlings
- 19mm - Sparrows and small birds

Netting is manufactured in standard UV stabilised polyethylene or flame retardent material and available in a variety of colours making them suitable for a variety of applications where they need to be almost invisible.




Colours:


- Black
- Stone
- Translucent

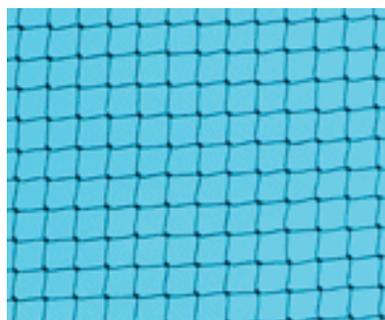


19mm black

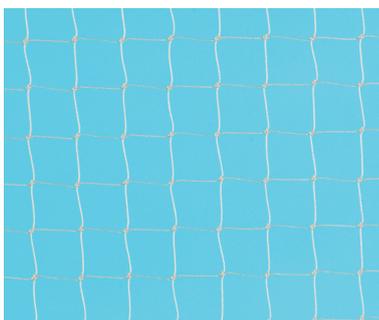

28mm stone

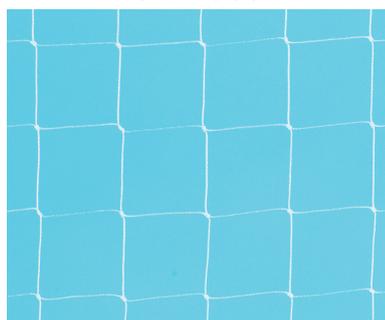

50mm translucent

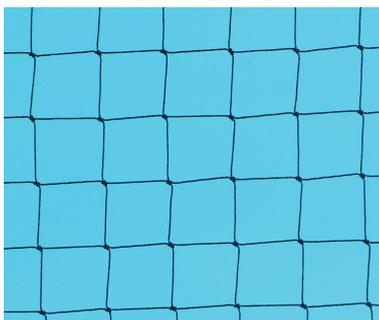

40mm black



75mm black


Stock Sizes:

- 5m x 5m, 5m x 10m,
 5m x 15m, 5m x 20m,
 10m x 10m, 10m x 15m,
 10m x 20m, 15m x 15m,
 15m x 20m, 20m x 20m.

How to install a 10m x 10m net:

Step 1.


Install corner fixings at every corner or every 10m along a straight run.

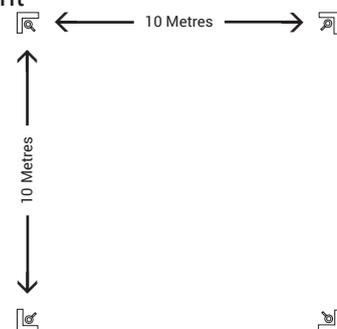

Step 2.


Fit intermediate fixings in a straight line between the corner fixings.

Use 1m intervals for 75mm and 50mm nets, 0.5m intervals for 40mm and 28mm nets and 0.3m intervals for 19mm nets.

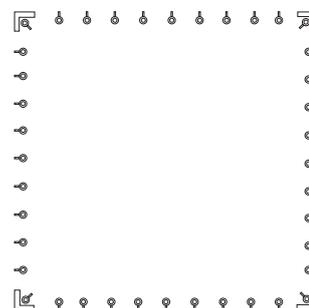

Step 3.

Install corner fixings at every corner or every 10m along a straight run.

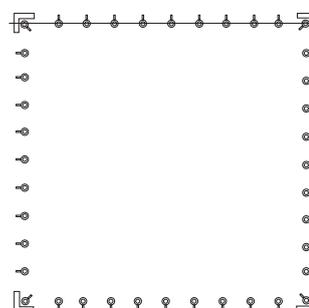

Step 4.

Loop one of the wire ends through the corner fixing and secure with either 2 copper ferrules or 2 wire rope grips.



Installation Guide

Bird Netting

Step 5.

Hook an opened barrel strainer to the other corner fixing and thread the free end of the wire rope through the eye.




Step 6.

Tension the wire by tightening the barrel strainer.



Step 7.

Repeat steps 3-6 for the other 3 sides of the area. Larger nets may require additional diagonal support wires.

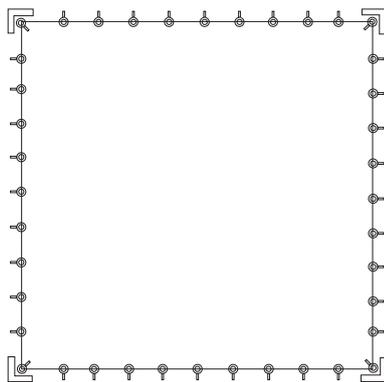

Step 8.

Top attach the net to the rope, attach one corner of the net to the corner fixing using a netting corner tie. When you reach each corner ensure that a netting corner tie is installed around the mesh and corner fixing.



Step 9.

Hog ring every mesh square around the edge to the wire rope ensuring that the net is pulled tight and square.



Galvanised Steel Fixings

Our galvanised steel fixings enable you to install a low cost netting solution.

The fixings and wire rope are made from galvanised or zinc plated steel, which is lower cost but has a shorter life span than stainless steel.

Stainless Steel Fixings

Our stainless steel fixings are ideal for professional and commercial installations.

The fixings and wire rope are made from A2 (304) stainless steel and will last over 10 years in normal UK weather conditions.

Corner Fixings

Corner fixings should be installed every 10m around the perimeter of the net. These more substantial fixings allow the wire rope to be tensioned to support the weight of the net. The type of corner fixing to be used on the material that the net is to be fixed to.

Masonry



This is the most common type of corner fixing. Use M6 or 6mm anchor bolts.

Steelwork



For steel beams and girder work; use 20mm beam clamps bolts.

Timber




For timber use 100mm vine eyes.

Cladding



For cladding and sheet steel use 15mm or 25mm cladding bolts.

Roof Tiles



Install the corner fixings into the ridge tiles of a roof using M6 anchor bolts.

Intermediate Fixings

If access is required behind the perimeter of the net our intermediate wire rope brackets allow the wire rope to be unhooked in between the corner fixings. The type of intermediate fixing to be used depends on the material that the nets is to be fixed to:

Masonry



Use 45mm screw eyes and wall plugs, hammer-in net spikes, or 38mm split pins and masonry rivits.

Steelwork



Use hammer-on beam clips. These are available in varying sizes according to the thickness of the beams.

Timber




For timber use 5mm screw eyes.

Cladding



Use angle brackets with 25mm self drill screws and bonded washers to ensure a water tight fixing.

Roof Tiles



Use hammer-on beam clips, slate brackets or stick-on bases.



PestFix... your supplier of choice

Intermediate fixings should be installed at regular intervals between the corner fixings. Use 1 metre intervals for 75mm and 50mm nets, ½ metre intervals for 40mm and 28mm nets and 1/3 metre intervals for 19mm nets.

Net Fixings

code

code

code

Nets should be fixed to the tensioned wire rope using steel hog rings for a long lasting installation.

Corner fixings should also be attached with netting corner ties for extra strength.

For easy removal of a net; use net clips instead of hog rings.

Net Zips

code

code

code

If regular access is required through the net (e.g. for light fixtures and roof access) use netting zips

To fit a zip to the net simply use steel hog rings to staple the fabric edging of the zip to the netting, using one staple per mesh square on each side of the net.

For extra strength; use netting corner ties at each end of the zip. Then unzip and snip open the netting behind it.

Contact Us

We are Open: **Monday to Friday 8am to 6pm - Order before 5pm for next day delivery**

Post: **PestFix, Unit 1D Littlehampton Marina, Ferry Road, Littlehampton, West Sussex BN17 5DS**

Telephone: **+44 (0) 1903 538 488** | Email: **sales@pestfix.co.uk** | Online: **www.pestfix.co.uk**

BS0618-1

Order Online 24/7: www.pestfix.co.uk