


COROTHERM RAFTER GLAZING BAR UNIVERSAL

For 10mm, 16mm and 25mm thick sheet.

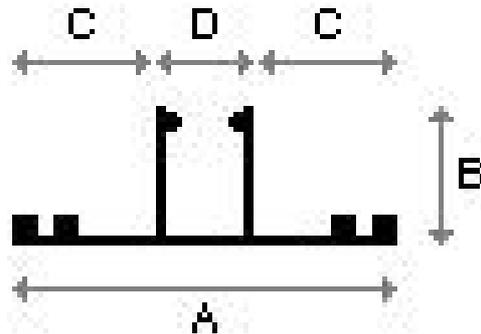

DIMENSION	SIZE (mm)
A	47
B	24
C	18.5
D	10


GAP BETWEEN SHEETS

An expansion gap of 3mm is needed between the edge of the sheet and the central fin of the glazing bar. So the total gap for the glazing bars will need to be $3\text{mm} + 10\text{mm} + 3\text{mm} = \mathbf{16\text{mm}}$.


GAP FOR SIDE FLASHINGS

The Side Flashings attach along the outer edge of the Rafter Glazing Bar, on the opposite side of the Glazing Bar to the sheet, to balance the top cap and weather the roof. An expansion gap of 3mm is needed between the edge of the side flashing and the central fin of the glazing bar.

10MM or 16MM SIDE FLASHING

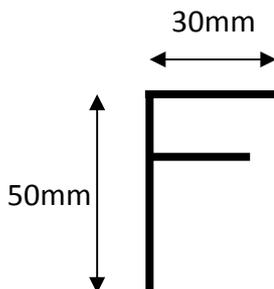

25MM SIDE FLASHING

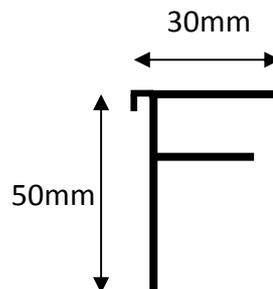

For using side flashing against a side-wall abutment, it is recommended that 10 or 16mm sheets and flashings are used rather than 25mm.