


Corotherm®


Polycarbonate Insulated Roofing Sheet

10mm Twinwall

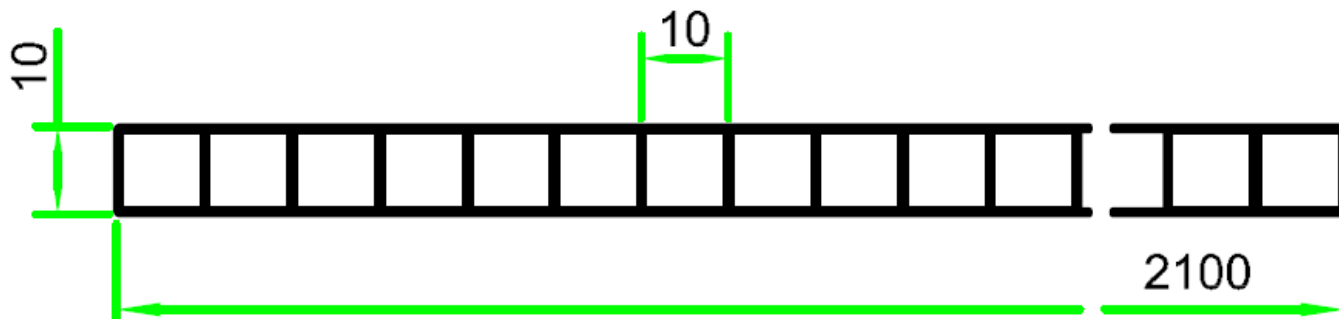

Span/Load Table			
Load (kN/m ²)	Sheet Width		
	700m m	980m m	1250m m
0.6		2.19	1.56
0.7	6.00	1.97	1.44
0.8	4.16	1.80	1.35
0.9	3.48	1.67	1.27
1.0	3.08	1.57	1.21

Safe span figures are based on 20mm edge engagement plus a safety factor of 1.2

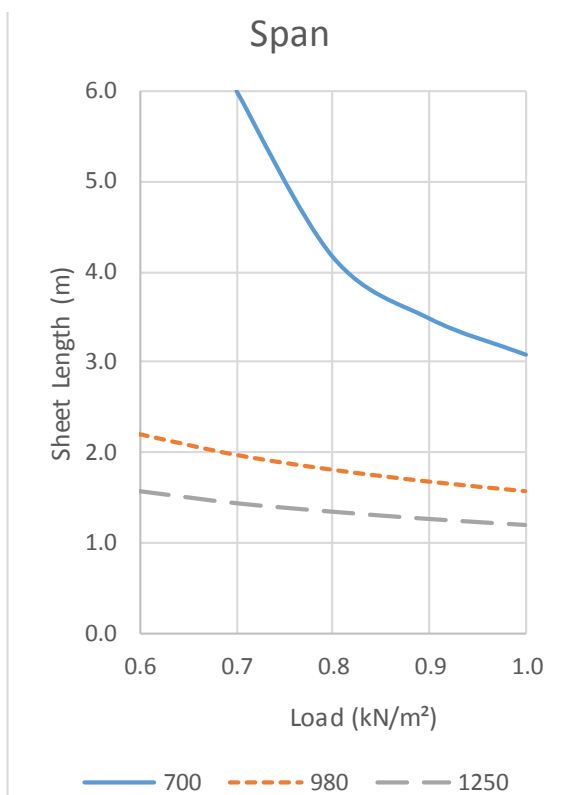

Colour	Transmission	
	Light	Solar
Clear	82%	80%
Bronze	33%	55%
Opal	40%	47%

Product Characteristics	
Width	≤1250mm +/- 4mm
Length	≤2100mm -0, +8mm 6m -0, +10mm Over 6m -0, +25mm
Thickness	10mm +/-0.5mm
Sheet Weight	1.7Kg/m ²
U Value	3.2W/m ² K
Min Curve Radius	1500mm



This information is given in good faith & is believed by Brett Martin Ltd to be accurate & reliable. Since the use of this information is not within Brett Martins control, no warranty, expressed or implied is given. It is the users' responsibility to determine whether the product is appropriate for their purpose.

Brett Martin Ltd. pursues a policy of continuous product development and reserves the right to amend specification without notice.

Brett Martin Ltd., 24 Roughfort Road, Mallusk, Co. Antrim, N.Ireland, BT36 4RB.

Tel: +44 (0)28 9084 9999 Fax: +44 (0)28 9083 6666 E-mail: technical@brettmartin.com

REF CODE Corotherm_010_0_2W_17



Corotherm is the multiwall polycarbonate sheet manufactured by Brett Martin. The sheet is characterised by high optical clarity, light transmission, impact resistance and durability. It is available in a range of standard sizes, clear and tinted. Corotherm Longlife has a coextruded UV protection layer on one side.

Warranty

There is 10 year limited warranty against loss of light transmission, yellowing and weather impact available for this product.

Quality

Manufactured under ISO 9001: 2008 to EN 16153:2013

Handling & Safety

Do not step directly on the rooflight. Use stepping boards. Work according to local safety regulations

Storage

Store in a shaded place, protect from direct sunlight and rain prior to installation. Avoid covering the sheets with heat absorbing materials. Avoid contact with chemicals. Protect the sheets from physical damage.

Installation

Make adequate allowance for thermal movement, nominally 3.5mm per metre. Holes drilled for fixings must be oversized. Sheet lengths must be limited to ensure there is no excessive movement at the end laps.

Service Temperature

For stable prolonged service ranging from -20°C to 100°C . (Short term unstressed -40°C to 130°C)

Maintenance

In order to maintain this product in good condition it should be cleaned periodically using suitable detergent cleaning agents. Do not use solvent cleaners. Do not scrub with brushes or sharp implements. Avoid cleaning in hot sun or high temperatures.



This information is given in good faith & is believed by Brett Martin Ltd to be accurate & reliable. Since the use of this information is not within Brett Martins control, no warranty, expressed or implied is given. It is the users' responsibility to determine whether the product is appropriate for their purpose.

Brett Martin Ltd. pursues a policy of continuous product development and reserves the right to amend specification without notice.

Brett Martin Ltd., 24 Roughfort Road, Mallusk, Co. Antrim, N.Ireland, BT36 4RB.

Tel: +44 (0)28 9084 9999 Fax: +44 (0)28 9083 6666 E-mail: technical@brettmartin.com

REF CODE Corotherm_010_0_2W_17