

Extreme Angle Master Flash®

Specifically designed for **Metal Roofing Industry**

For applications with a 3/12 to 16/12 pitch, while accepting & responding to the most commonly encountered pipe penetrations.

Advanced Ozone Resistance tested to...		EPDM 70 hour @ 500 pphm	HIGH TEMP GREY SILICONE 70 hour @ 500 pphm
High Temperature Resistance Tested to	Intermittent	+135°C (+275°F)	+260°C (+500°F)
	Continuous	+100°C (+212°F)	+225°C (+437°F)
Low Temperature Resistance tested to...		- 55°C (-67°F)	- 74°C (-101°F)
Compression Set Maximum...		25%	50%

*Complete specification data and testing methods are available upon request.



The built in 12/12 pitch

Allows to handle any extreme roof pitch (3/12 - 16/12), sleeve flexibility accommodates vibration and pipe movement caused by expansion/contraction. Easy on-site customization accommodates all normal installations.


Weather Protection

Made of EPDM or Grey Silicone,

These flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.

Adaptable Base

The base is designed to mold to most panel configurations and roof pitches regardless of vent location.

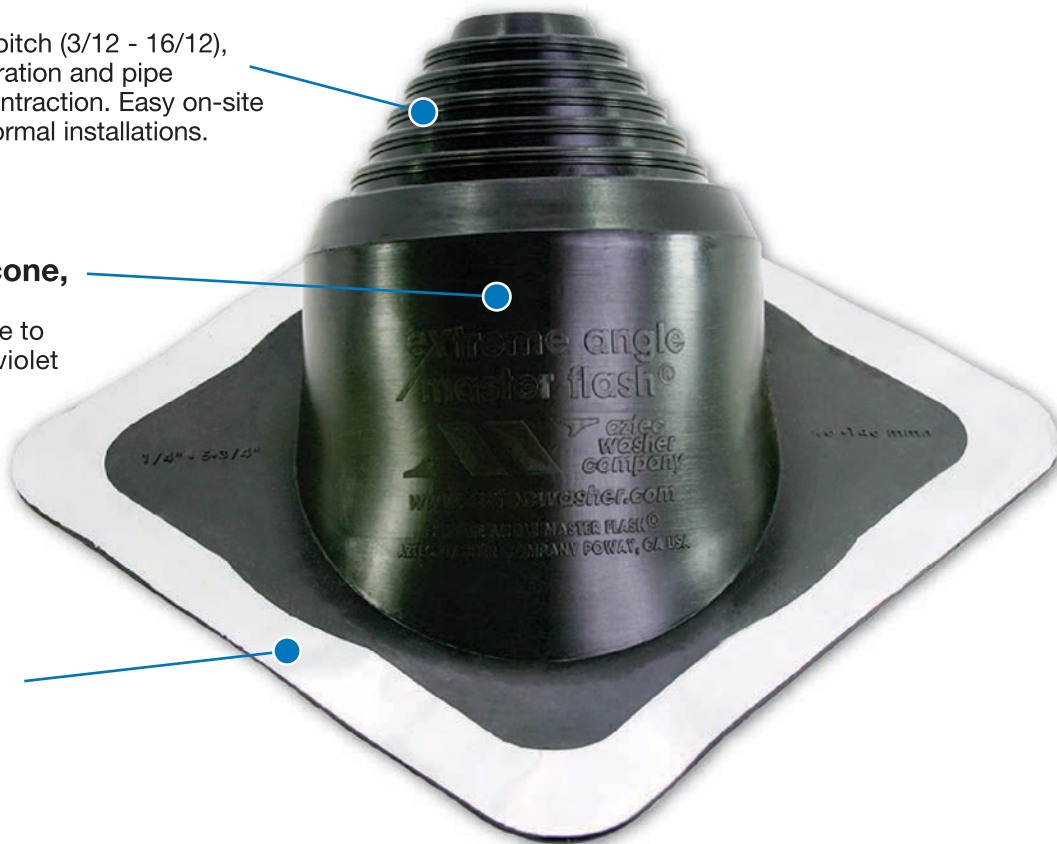

	Compound	Part No.		Flashing Details	
#1 Extreme Angle 1/4" - 5-3/4" (6 - 146mm)	BLACK EPDM	EA101BA			A-Top opening
	GREY SILICONE	EA102GX	B-Cut to suit pipe size		1/4" - 5-3/4" (6 - 146mm)
				C-Base	11" (279mm)
	Compound	Part No.		Flashing Details	
#2 Extreme Angle 4" - 8" (101 - 203mm)	BLACK EPDM	EA201BA			A-Top opening
	GREY SILICONE	EA202GX	B-Cut to suit pipe size		4" - 8" (101-203mm)
				C-Base	14-1/4" (362mm)