

Kytun



Kytun Ventilated Ridge Roll Copper 6m

Product Information


For use on pitched roof ridges and hips. Corrugated copper strips can be formed over roof slate / tile profiles, integral sealing tapes bond the copper strips to the roof covering, protecting against wind uplift and driving rain penetration.

Central Polypropylene ventilating fabric is both air & vapour permeable.

The two corrugated copper side flaps are designed to drape down over the top row of tiles / slates on either side as the roll is opened out. The underside has a strip of self-adhesive butyl protected by an easy-release backing tape.



Kytun Ventilated Ridge Roll Copper 6m

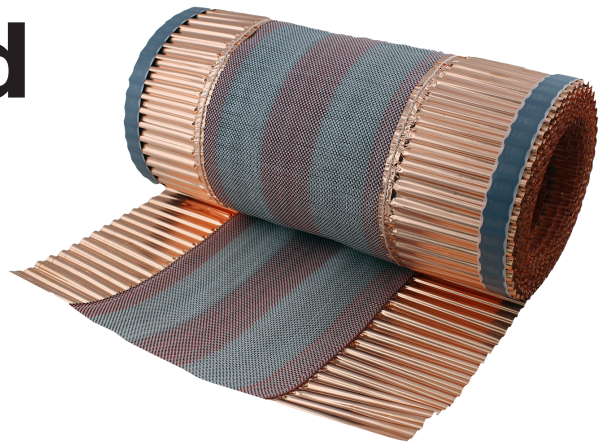

Installation

In order to fix this product correctly, a secure ridge tree or ridge batten(s) will be required, see Fig. 1. The finished height of the ridge tree/ridge batten must be a maximum of 20mm from the underside of the Ridge Tile. This allows the subsequent ridge fixing screw to get a strong fixing into the batten.

For the purposes of roof ventilation (where required), the roof underlay should stop short either side of the ridge by 25-30mm. When the top course of tiles has been fixed, the ventilated ridge roll is then placed centrally along the ridge tree / batten. Fix the Kytun Ventilated Ridge Roll Copper 6m at 300mm centres along it's length. The two corrugated side

flaps are designed to drape down over the top row of tiles on either side as the roll is opened out. The underside has a strip of self-adhesive butyl protected by an easy-release backing tape. Removing the tape, the Ridge Roll is firmly applied by hand to the roof tiles. A ridge roll applicator is then used to securely fix in place, see Fig. 2.

The ridge tiles should now be laid in place and mechanically fixed. We would recommend the Kytun Uni-Fix Dry Ridge Union Bracket, Fixing Plate and Screw Kit (available separately) to provide a weatherproof, secure fix for this application - see Fig. 3.

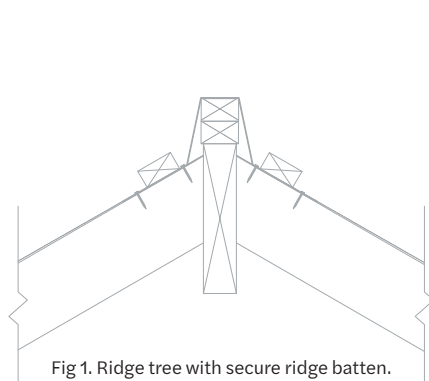


Fig 1. Ridge tree with secure ridge batten.

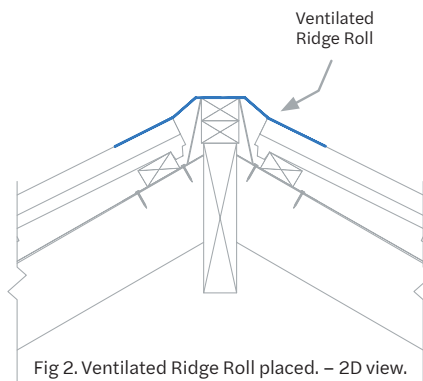


Fig 2. Ventilated Ridge Roll placed. - 2D view.

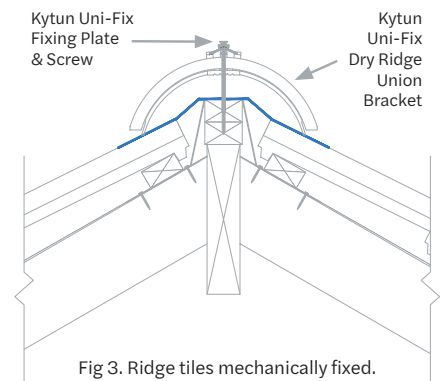


Fig 3. Ridge tiles mechanically fixed.

Kytun

IRL (Head Office)
Keenaghan
Kilmacrenan
Letterkenny, Co. Donegal
F92 DW64
T: +353 (0) 74 91 39500
E: info@kytun.com

UK (Manufacturing Centre)
Senhouse Road
Darlington
Durham
DL1 4YB
T: +44 (0) 168 429 3702
E: info@kytun.com