


## Aluminium

## Performance

## Plus<sup>+</sup>

# Tile Dry Verge System Standard

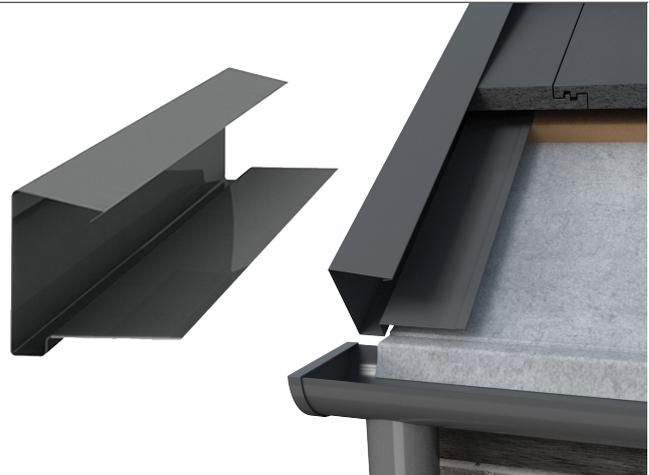

The Kytun Performance Plus Tile Dry Verge System - Standard can be used with both flat interlocking single lap roof tiles and double lap plain tiles. This system permanently secures tile applications on gable ends protecting the verge from wind uplift and rain. Manufactured using high grade pre-primed polyester coated aluminium.

Our Kytun Performance Plus Tile Dry Verge System helps to create a seamless and clean dry verge detail with an aesthetically pleasing finish to the gable ends on your next roofing project. This weathertight system ensures water cannot penetrate, providing an enhanced level of protection for all your roofs. The unique design also provides additional protection to the tiles on the verge by securing them in place. As well as being weatherproof, strong and durable, the Kytun Tile Dry Verge Systems are also maintenance-free.

### Features & Benefits

- Provides full wind uplift and rain protection demonstrated by independent BRE testing
- Integral drain channel actively directs rainwater into the eaves gutter
- Extremely easy and quick to install
- Meets BS 5534 & BS8612 requirements & NHBC guidelines
- Requires no maintenance once installed
- Huge labour-saving costs
- Compatible with most flat, single lap roof tiles and double lap plain tiles on the market
- Creates continuous clean verge appearance
- 30yr aluminium durability warranty and 20yr colour warranty

### Technical Details

<b>Product Code</b>	C08S / C08 / C08L
<b>Material</b>	Polyester Coated Aluminium
<b>Pack Qty</b>	4
<b>Pack Weight</b>	5.6Kg


### Colour options




### Quality Standards & Certification




## Profiles

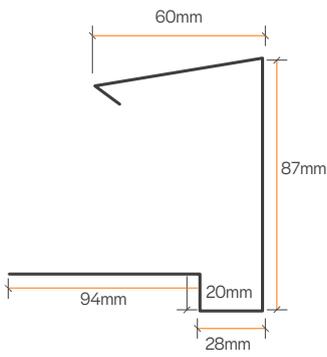

**C08S - 50mm**

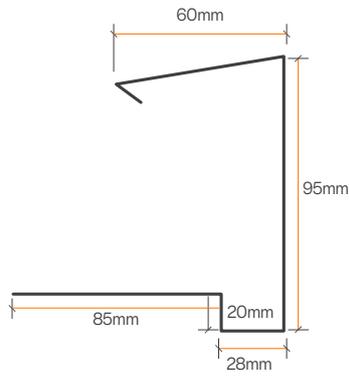

**C08 - 65mm**

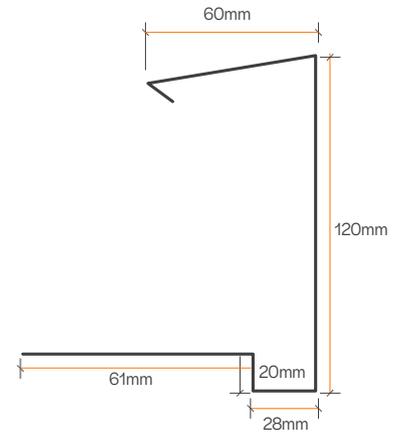

**C08L - 85mm**