



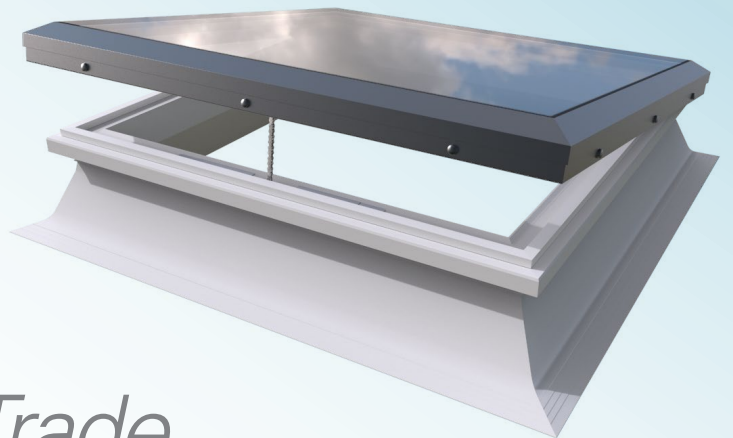

NEW
in 2020

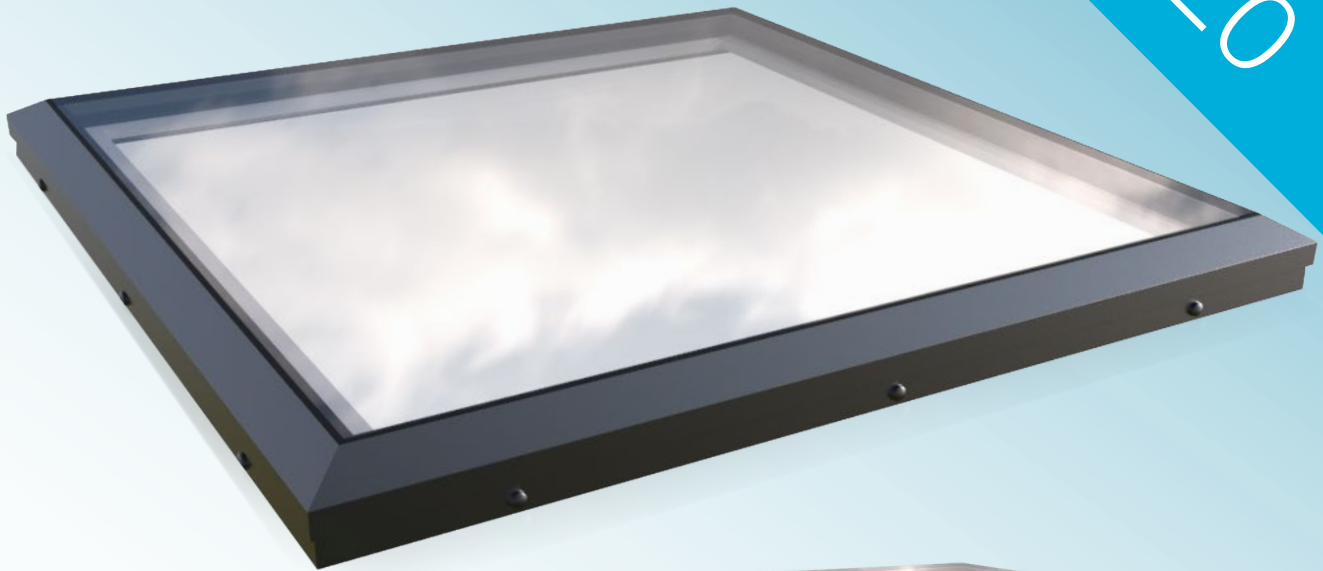

mardome *glassTrade*
Flat Glass Rooflights

Elegant, affordable daylight...*fast!*

Mardome Glass Trade is the latest addition to the extensive range of Mardome modular rooflights, manufactured in the UK. This elegant flat glass rooflight provides quality features at highly competitive prices, with some variants delivered in as little as 48 hours from order.

Designed with both the building owner and installer in mind and to cater for the large and growing trend for flat roofed home extensions and light, bright open plan living. Mardome Glass Trade is also equally at home on larger commercial property developments giving homeowners, independent trades people and larger construction trades alike the ability to quickly and confidently bring stylish daylighting to all types of buildings.

Premium features

Being thermally broken and non-fragile as standard, with an array of opening, ventilation and fixing options to suit a multitude of requirements, Mardome Glass Trade is an efficient, safe, and versatile flat glass rooflight that can be relied upon.


Affordable and fast

Mardome Glass Trade has been designed for rapid, efficient manufacture and installation, delivering a quality flat glass rooflight in the budget and time frame that modern construction projects demand.


Performance and Design Features

Standard sizes in mm (Other/custom sizes also available)	600 x 600 750 x 750 900 x 600	900 x 900 1000 x 1000 1200 x 600	1200 x 900 1200 x 1200 1500 x 1000
Pitch	Suitable for mounting at pitches of 2–15°		
Framework	Aluminium frame Powder coated to RAL 7016 anthracite grey		
Glazing	6mm toughened outer, argon filled cavity, 9.5mm laminated inner		
Thermal Performance	Standard centre pane U-value of 1.1 W/m ² K Thermally broken construction		
Non-fragility	Non-fragile to CWCT TN-92 (for class 2 roofs)		
Opening options	Manual worm drive operated via pole Powered via wall switch or optional remote and rain sensor		
Ventilation options	Manual or automatic hit and miss trickle ventilation Powered extraction ventilation		
Fixing options	Direct to builders upstand (includes additional uPVC frame if opening/ventilated) With 150mm uPVC kerb for fixing at roof surface level With 300mm uPVC kerb for fixing below insulation		

Glazed unit simply screw fixes to existing builders upstand or optional uPVC kerb.

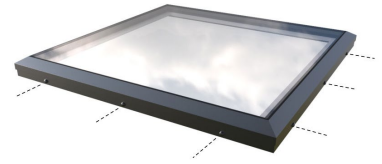

Standard uPVC kerb provides 150mm roof membrane termination height.

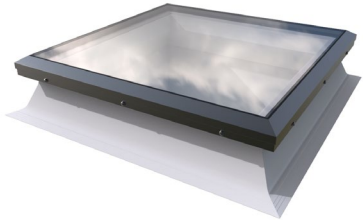

Tall uPVC kerb provides 300mm membrane termination height for refurbishment jobs where extra insulation is being added to existing roof.



Manual opening option.



Powered opening option with concealed actuators.



Ariel Plastics
Speedwell Industrial Estate
Staveley, Derbyshire
S43 3JP

Tel: 01246 281111
Fax: 01246 561111
Email: info@arielplastics.com

For the latest information visit
the company's website:
www.arielplastics.com

FOLLOW US



Build your own
rooflight with the



mardome
Configurator



All reasonable care has been taken in the compilation of the information contained within this literature. All recommendations on the use of our products are made without guarantee as conditions of use are beyond the control of Brett Martin. It is the customer's responsibility to ensure that the product is fit for its intended purpose and that the actual conditions of use are suitable. Brett Martin pursues a policy of continuous product development and reserves the right to amend specifications without prior notice.