


# How to measure a rooflight


Whitesales products are compatible with site-formed builders' curb and the measurements required will be:

- External dimension of upstand (A)
- The thickness of the upstand (B)

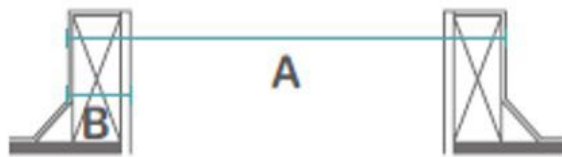

If you require a uPVC upstand the measurements required will be:

- Roof opening (X)
- Daylight size (Z)

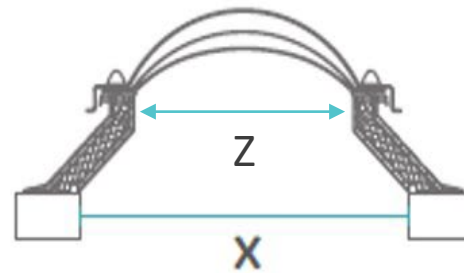

There is no difference between a rooflight and a skylight. They are both defined as windows built into a flat roof/ceiling.

However, rooflights and skylights should not be confused with the term 'roof window'.

Roof windows are always pitched. They are designed to be installed in the same orientation and plane as the surrounding roof and are often used for projects such as loft conversions.