

For internal angles, the facing should be trimmed back a distance equivalent to the insulation thickness, allowing the insulation layers to overlap.



Fig. 6 Internal Angle Joint in Spacetherm Multi / Spacetherm A2 Multi

After the boards are fixed in place, the joint should be taped and any gaps filled using a suitable filling compound. If additional strength is required at these edges, the use of a metal angle jointing strip should be considered.

5 JOINTING PANELS

Joints between adjacent Spacetherm Multi / Spacetherm A2 Multi boards are made in the conventional manner, i.e. taped and filled with a gypsum based jointing compound.

Before taping and filling, please ensure the board surfaces are free from dust (it may be necessary to use a vacuum cleaner), as excess dust on the surface may prevent adequate adhesion. Joints are then sanded as normal.



Fig. 7 Preparing Spacetherm Multi / Spacetherm A2 Multi Surface for Jointing

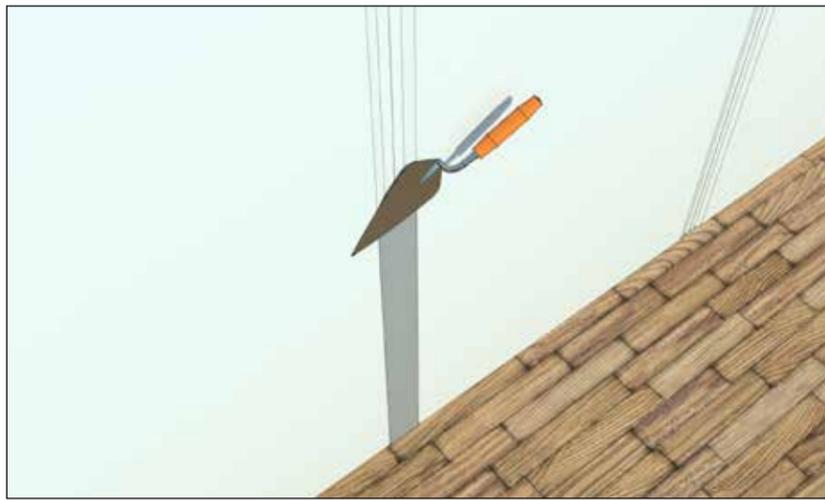


Fig. 8 Taping and Filling Joints in Spacetherm Multi / Spacetherm A2 Multi

6 DECORATING

Wipe the Spacetherm Multi / Spacetherm A2 Multi panels with a dry cloth to remove any dust that may have accumulated on the surface during the installation process. Where the finish is to be paint, wallpaper, tiles etc. use MgO primer evenly over the entire upgraded wall area and allow to dry. A single layer is often enough and will prepare the board to accept these finishes.

Please note when a plaster finish is required, we advise the use of Plasterbond primer to prime the board prior to the application of plaster. The boards must be dry and clean before application. Appropriate vapour open plasters can be applied at any point after 24 hours and Plasterbond has fully cured. Ensure that the plaster is appropriate to the task and we advise a trial area is used to assess suitability. Installation instructions are available on the website and should be followed. Where lime plaster is proposed please contact the technical department.

7 SUBSEQUENT FIXINGS

Although the Spacetherm Multi / Spacetherm A2 Multi panels are durable, it is not recommended that fixings are made into Spacetherm Multi / Spacetherm A2 Multi. Any fixings that are required in these areas should be made through the Spacetherm Multi panels into the substrate beneath by drilling and plugging.

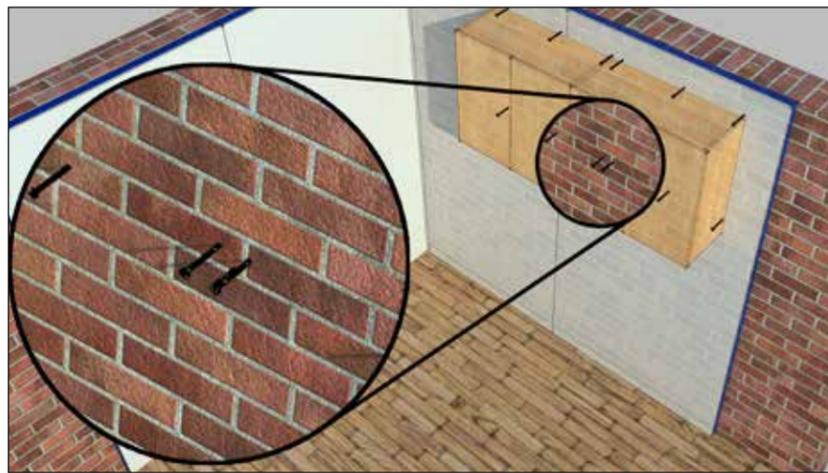


Fig. 9 Fixing kitchen units through Spacetherm Multi / Spacetherm A2 Multi

For more information contact us:

+44 (0) 1250 872261
www.proctorgroup.com

Revised Mar 2021



BEWARE
 Packs/Boards exceeds 15Kg


Products **MUST NOT** be stacked
 Products must be kept dry **AT ALL TIMES**

INSTALLATION GUIDE

SPACETHERM® MULTI / SPACETHERM® A2 MULTI

WALLS: DIRECT FIX TO MASONRY

DOMESTIC

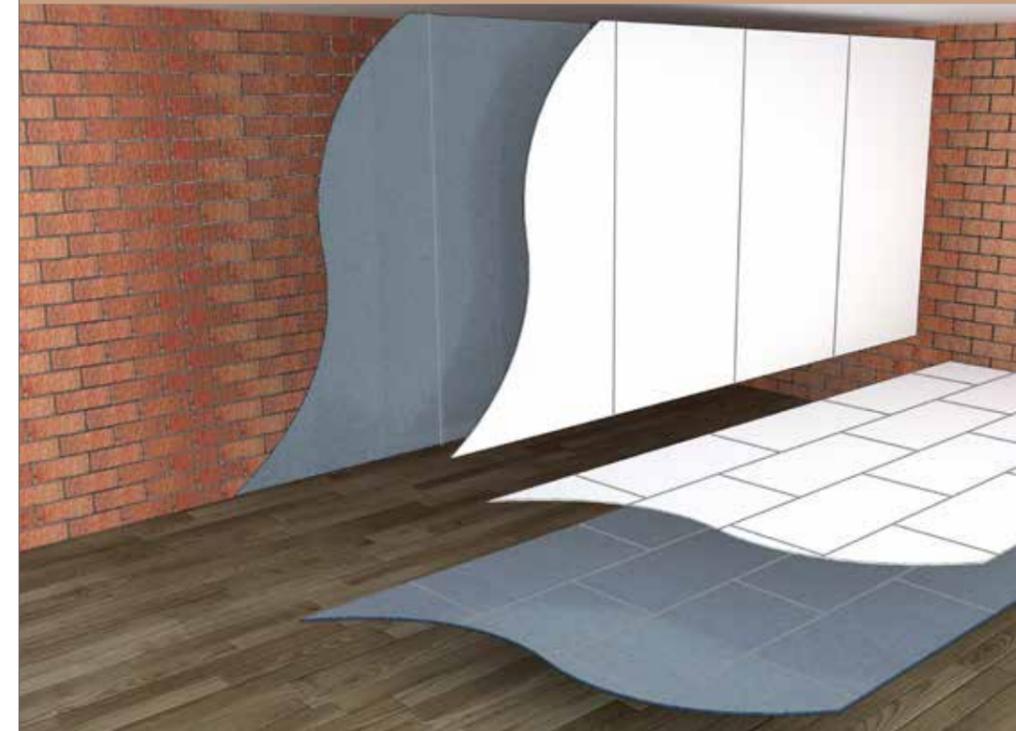

SPACETHERM + 6mm MgO BOARD /
 SPACETHERM SLENTEX A2 + 6MM MGO

CUST

QTY

LOT NO



1 BEFORE YOU START

- Ensure safe access and egress to the work area.
- Restrict access – control the number of people entering the work area.
- Close all unnecessary doors and seal if possible.
- Plan how you are going to carry out the work before you begin.
- Ensure substrates are level and suitable for fixing, and repair as necessary.
- Remove and relocate sockets and switches as necessary.

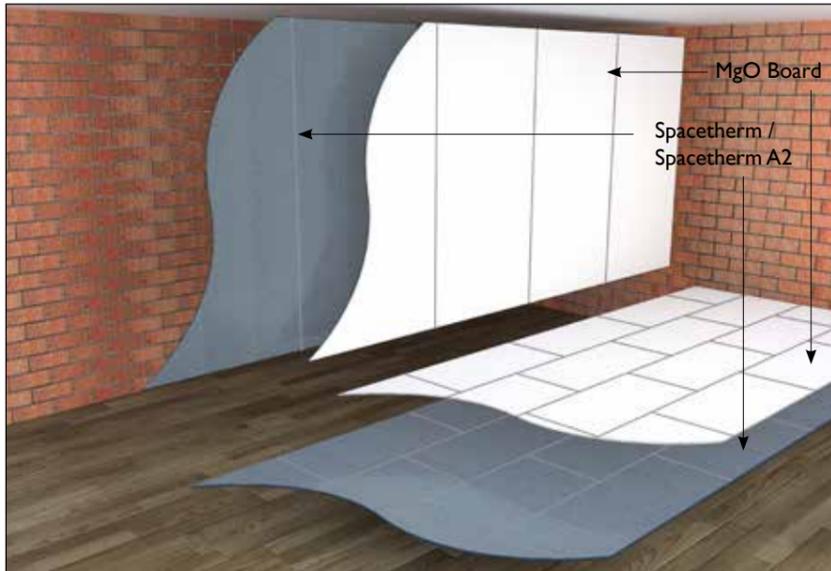


Fig. 1 Spacetherm Multi / Spacetherm A2 Multi Application

2 CUTTING BOARDS

Where possible it is recommended that the panels are cut outside. If it is not possible to cut the panels outside then care should be taken to provide adequate ventilation to the internal cutting area.

Mechanical cutting is best done with a jigsaw or circular saw, whichever is most appropriate for the type of cut. Before cutting, ensure the board is adequately supported, and cuts should always be made from the internal face of the board (e.g. Plasterboard side)



Fig. 2 Cutting Spacetherm Multi / Spacetherm A2 Multi Boards

Sockets and switches must be surface mounted. Any fixings that are required in these areas should be made through the Spacetherm Multi / Spacetherm A2 Multi panels into the substrate beneath by drilling and plugging.

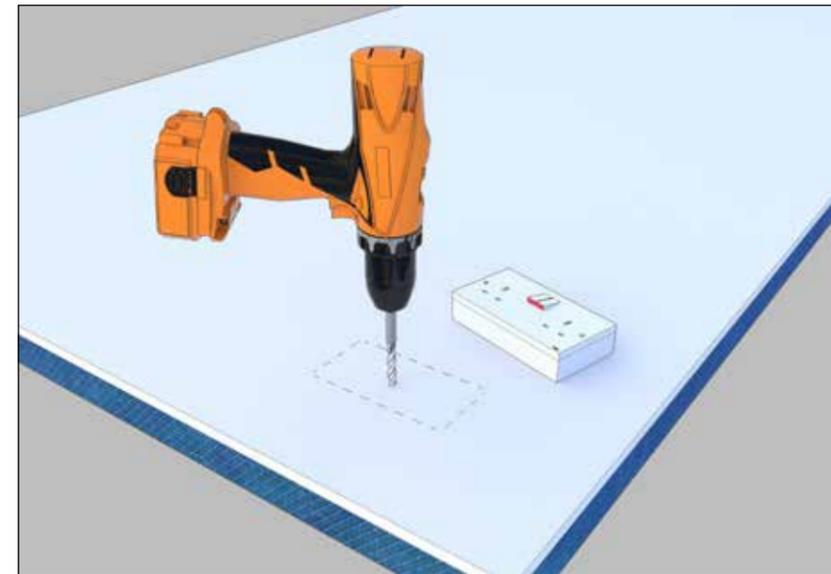


Fig. 3 Making cut-outs in Spacetherm Multi / Spacetherm A2 Multi

Any indoor cutting should be carried out over a plastic sheet to contain dust, and the use of mechanical cutters with local dust extraction systems is recommended. Goggles, gloves and a dust mask should always be worn during the cutting process.

3 FIXING BOARDS

Spacetherm Multi / Spacetherm A2 Multi boards are fixed directly to masonry substrates using shot-fired masonry nails. Prior to installation installers should ensure the substrate is suitable for the use of such fixings, and the surface is sufficiently level and smooth as the direct fixing method does not allow for levelling. If the wall is not sufficiently level, or large voids will be present behind the insulation panels, it is recommended a parge coat be applied prior to installation of Spacetherm Multi / Spacetherm A2 Multi panels. If this coat is applied, it must be ensured that fixings penetrate to the solid masonry below to guarantee adequate fixing strength.

Nail fixing should be made at not more than 500mm centres horizontally and vertically, with all edges and joints adequately secured. Nailgun power settings will vary according to equipment and substrate, and the advice of tool manufacturers should be sought prior to installation. Typically, nail length should be the board thickness +25mm.



Fig. 4 Direct fixing Spacetherm Multi / Spacetherm A2 Multi using nailgun

Fixing centres should be assessed by the project/structural engineer to ensure that adequate fixings are used to resist any imposed or dead loads, wind loads etc that may be exerted on the insulated panels.

Consideration should be made to their fire resistance and advice sought from the fixing manufacturer/suppliers.

4 INTERNAL / EXTERNAL ANGLES

Spacetherm Multi / Spacetherm A2 Multi boards at corners should be installed in such a way that the insulation layer overlap to prevent a cold bridge at the junction.

To achieve this, in an external angle, the main wall insulation board should extend beyond the edge of the reveal by a distance equal to the insulation thickness of the panel. The edge of the insulation layer can then be trimmed at a distance equivalent to the main wall insulation thickness from the edge, allowing the two boards to intersect.



Fig. 5 External Angle Joint in Spacetherm Multi / Spacetherm A2 Multi

Call our Technical Department

The A. Proctor Group has a dedicated Technical Department which can assist with installation details, view drawings for approval and give specialist advice on the correct use of the A. Proctor Group products.

For Technical Advice on installation details and product applications contact the A. Proctor Tecline:

Telephone
01250 872261

Facsimile
01250 872727

Email
technical@proctorgroup.com