



# ray.lux™

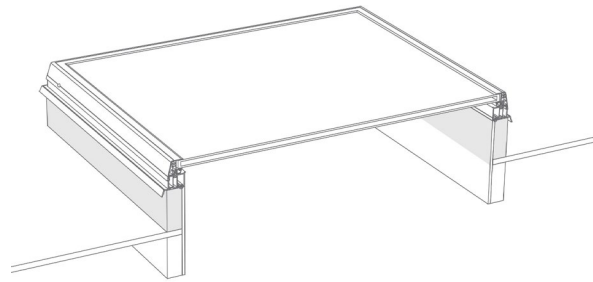

ray.lux Glass to suit **builders upstand**

	Size ref	To suit external curb size (mm)
Square	S2	600x600
	S4	700x700
	S5	800 x 800
	S7	900 x 900
	S8	1000 x 1000
	S9	1100 x 1100
	S11	1300 x 1300

Rectangular	R5	700 x 1000
	R6	700 x 1300
	R7	800 x 1100
	R16	1000 x 1300
	R17a	1100 x 1600
	R19	1100 x 2100
	R23c	1300 x 2300

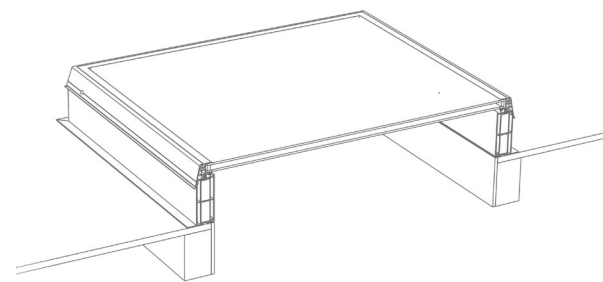

ray.lux Glass with **uPVC 150mm upstand**

	Size ref	To suit roof opening size (mm)
Square	S2	500 x 500
	S4	600 x 600
	S5	700 x 700
	S7	800 x 800
	S8	900 x 900
	S9	1000 x 1000
	S11	1200 x 1200

Rectangular	R5	600 x 900
	R6	600 x 1200
	R7	700 x 1000
	R16	900 x 1200
	R17a	1000 x 1500
	R19	1000 x 2000
	R23c	1200 x 2200

## Ventilation Options:

- Fixed – no ventilation
- Manually opening (winding rods sold separately).
- Electrically opening (supplied with retractive switch as standard)

## Accessories:

- 1.5m, 2m and 3m winding rods
- Standard comfort control kit (control panel, remote control and rain sensor)
- Premium comfort control kit (open/close manual switch and internal & external temperature, wireless weather station including wind & rain sensor). Remote sold separately.