



Data sheet

EPDM Circular Outlet (Smooth Flange)




Function:	EPDM circular downpipe outlets are used to bond to EPDM sheet membranes and bituminous membranes around downpipe roof drainage outlets. The drain connector has a smooth flange to improve bonding with adhesive to the EPDM or bituminous membrane. The slightly conical shape of the spigot enables fast and simple installation into drainpipes. There are two rings towards the top of the spigot which secures the outlet in place and prevents water rising from the inside of the drainpipe. Always prime the outlet and membrane before installation.		
Compatibility:	They are compatible with EPDM or bituminous membranes.		
Range:	DN 40 - DN 60 - DN 75 - DN 80 - DN 90 - DN 100 - DN 110 - DN 125 - DN 140 - DN 150 - DN 160 - DN 200.		
Performance:	Resistant to deterioration by the sun, ozone and other agents or chemicals normally found in the atmosphere. They have excellent flexibility even at low temperatures. The mechanical properties are maintained in the long term.		
Operating temperature:	-20°C; +70°C	Included accessories:	N/A
Recycled product:	No	Recyclable:	Yes
Material:	EPDM	Optional accessories:	Universal leaf excluders Gravel excluders Rigid extension shank Flexible heating element

If not otherwise indicated, all measurements are expressed in millimetres.

Data Sheet

EPDM Circular Outlet (Smooth Flange)

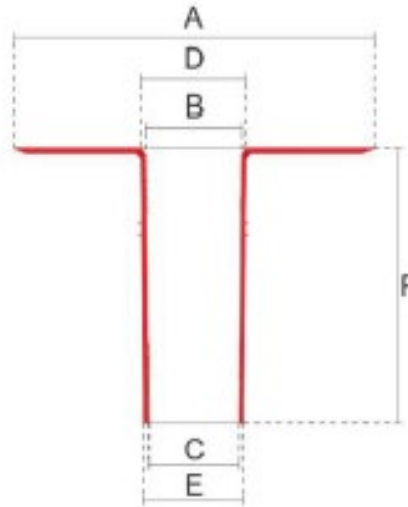

Item	Description	A	B	C	D	E	F
RO-EPDM-090-040-240-040-Z	EPDM Circular Roof Outlet (smooth flange) - H240mm - D40mm	235	26	24	33	29	243
RO-EPDM-090-040-240-060-Z	EPDM Circular Roof Outlet (smooth flange) - H240mm - D60mm	235	48	43	53	48	243
RO-EPDM-090-040-240-075-Z	EPDM Circular Roof Outlet (smooth flange) - H240mm - D75mm	320	65	61	70	66	243
RO-EPDM-090-040-240-080-Z	EPDM Circular Roof Outlet (smooth flange) - H240mm - H80mm	280	69	64	74	69	243
RO-EPDM-090-040-240-090-Z	EPDM Circular Roof Outlet (smooth flange) - H240mm - D90mm	320	77	73	82	78	243
RO-EPDM-090-040-240-100-Z	EPDM Circular Roof Outlet (smooth flange) - H240mm - D100mm	300	89	84	94	89	243
RO-EPDM-090-040-240-110-Z	EPDM Circular Roof Outlet (smooth flange) - H240mm - D110mm	320	91	87	97	92	243
RO-EPDM-090-040-240-125-Z	EPDM Circular Roof Outlet (smooth flange) - H240mm - D125mm	320	114	109	119	114	243
RO-EPDM-090-040-240-140-Z	EPDM Circular Roof Outlet (smooth flange) - H240mm - D140mm	380	127	122	132	127	243
RO-EPDM-090-040-240-150-Z	EPDM Circular Roof Outlet (smooth flange) - H240mm - D150mm	380	136	131	141	136	243
RO-EPDM-090-040-240-160-Z	EPDM Circular Roof Outlet (smooth flange) - H240mm - D160mm	380	146	141	151	146	243
RO-EPDM-090-040-240-200-Z	EPDM Circular Roof Outlet (smooth flange) - H240mm - D200mm	440	185	180	190	185	243

Additional Information:

For more information on interface with connectors etc. please refer to the corresponding Accessories datasheets.

