



Data Sheet

PVC Circular Roof Outlet



Function: Circular PVC drain connector designed to be welded to prefabricated synthetic PVC waterproofing membranes to connect to downpipe rainwater drains. They have a smooth flange to improve welding to the membrane; they have two rings on the outside of the shank which acts as drain trap to help seal the gap between the drainage outlet itself and the rainwater drain. The shank is slightly tapered to help installation into the drainpipe.

Material: PVC

Compatibility: They are compatible with most PVC membranes.

Range: DN 40 - DN 60 - DN 75 - DN 80 - DN 90 - DN 100 - DN 110 - DN 125 - DN 140 - DN 150 - DN 160 - DN 200

Performance: Resistant to deterioration by the UV and sunlight, ozone and other normal atmospheric chemicals. They have excellent flexibility even at low temperatures. They are designed to be durable and robust in the long term.

Operating Temperature: -20°C; +70°C


Included accessories: N/A

Optional accessories: Universal leaf excluders
Gravel excluders
Rigid extension shank

Recycled Product: No

Recyclable Product: Yes

PVC Circular Roof Outlet Datasheet– page 2

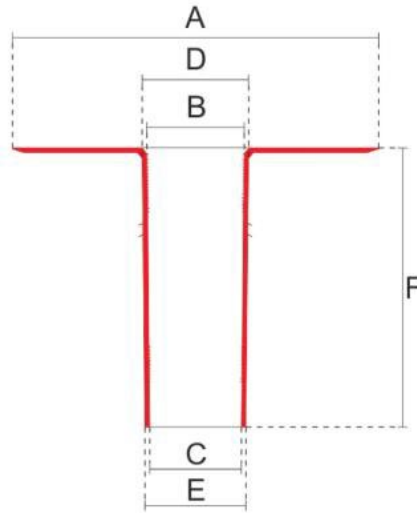

Line Item	Description	A	B	C	D	E	F
RO-PVC-120-040-240-040-Z	PVC Circular Roof Outlet (smooth flange) H240mm - D40mm	235	26	24	33	29	243
RO-PVC-120-040-240-060-Z	PVC Circular Roof Outlet (smooth flange) H240mm - D60mm	235	48	43	53	48	243
RO-PVC-120-040-240-075-Z	PVC Circular Roof Outlet (smooth flange) H240mm - D75mm	320	65	61	70	66	243
RO-PVC-120-040-240-080-Z	PVC Circular Roof Outlet (smooth flange) H240mm - D80mm	280	69	64	74	69	243
RO-PVC-120-040-240-090-Z	PVC Circular Roof Outlet (smooth flange) H240mm - D90mm	320	77	73	82	78	243
RO-PVC-120-040-240-100-Z	PVC Circular Roof Outlet (smooth flange) H240mm - D100mm	300	89	84	94	89	243
RO-PVC-120-040-240-110-Z	PVC Circular Roof Outlet (smooth flange) H240mm - D110mm	320	91	87	97	92	243
RO-PVC-120-040-240-125-Z	PVC Circular Roof Outlet (smooth flange) H240mm - D125mm	320	114	109	119	114	243
RO-PVC-120-040-240-140-Z	PVC Circular Roof Outlet (smooth flange) H240mm - D140mm	380	127	122	132	127	243
RO-PVC-120-040-240-150-Z	PVC Circular Roof Outlet (smooth flange) H240mm - D150mm	380	136	131	141	136	243
RO-PVC-120-040-240-160-Z	PVC Circular Roof Outlet (smooth flange) H240mm - D160mm	380	146	141	151	146	243
RO-PVC-120-040-240-200-Z	PVC Circular Roof Outlet (smooth flange) H240mm - D200mm	440	185	180	190	185	243
RO-PVC-120-041-240-125-Z	PVC Circular Roof Outlet (smooth flange) for HDPE H240-D125	320	111	106	117	111	243

Additional Information:

Always prime both outlet and surface before installation.

We recommend the gully and roofing felt be carefully cleaned and primed before welding.

