



Data sheet

PVC Circular Roof Outlet (Smooth Flange)




Function:	<p>PVC circular downpipe outlets designed to be welded to synthetic PVC roofing membranes around roof drainage downpipes. The flange is soft and floppy and easy to manipulate.</p> <p>The flange is smooth to improve the bond and welding should only be carried out with a hot air gun, not a naked flame.</p> <p>The slightly conical shape of the spigot enables fast and simple installation into drainpipes.</p> <p>Always prime the outlet and membrane before installation.</p>		
Compatibility:	They are compatible with single play PVC membranes.		
Range:	DN 80 - DN 90 - DN 100 - DN 110 - DN 125 - DN 140 - DN 150 - DN 160 - DN 200		
Performance:	Resistant to deterioration by the sun, ozone and other agents or chemicals normally found in the atmosphere. They have excellent flexibility even at low temperatures. The mechanical properties are maintained in the long term.		
Operating temperature:	-20°C; +70°C	Included accessories:	N/A
Recycled product:	No	Recyclable:	Yes
Material:	PVC	Optional accessories:	Universal leaf excluders Gravel excluders Rigid extension shank Flexible heating element

If not otherwise indicated, all measurements are expressed in millimetres.

Data Sheet

PVC Circular Roof Outlet (Smooth Flange)

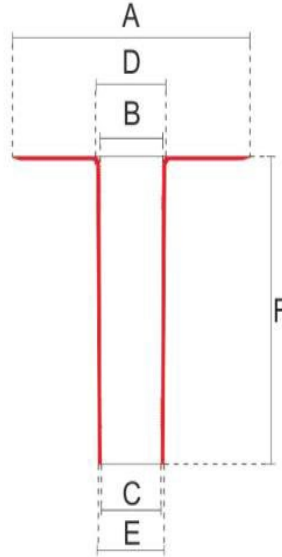

Item	Description	A	B	C	D	E	F
RO-PVC-120-150-600-080-Z	PVC Extra Long Circ.Outlet (smooth flange) H600mm - D80mm	286	65	63	72	70	600
RO-PVC-120-150-600-090-Z	PVC Extra Long Circ.Outlet (smooth flange) H600mm - D90mm	286	74	72	81	79	600
RO-PVC-120-150-600-100-Z	PVC Extra Long Circ.Outlet (smooth flange) H600mm - D100mm	286	85	83	92	90	600
RO-PVC-120-150-600-110-Z	PVC Extra Long Circ.Outlet (smooth flange) H600mm - D110mm	307	93	91	100	98	600
RO-PVC-120-150-600-125-Z	PVC Extra Long Circ.Outlet (smooth flange) H600mm - D125mm	307	107	705	114	112	600
RO-PVC-120-150-600-140-Z	PVC Extra Long Circ.Outlet (smooth flange) H600mm - D140mm	360	125	123	132	130	600
RO-PVC-120-150-600-150-Z	PVC Extra Long Circ.Outlet (smooth flange) H600mm - D150mm	360	135	133	142	140	600
RO-PVC-120-150-600-160-Z	PVC Extra Long Circ.Outlet (smooth flange) H600mm - D160mm	360	138	136	145	143	600
RO-PVC-120-150-600-200-Z	PVC Extra Long Circ.Outlet (smooth flange) H600mm - D200mm	360	178	176	185	183	600

Additional Information:

For more information on interface with connectors etc. please refer to the corresponding Accessories datasheets.

