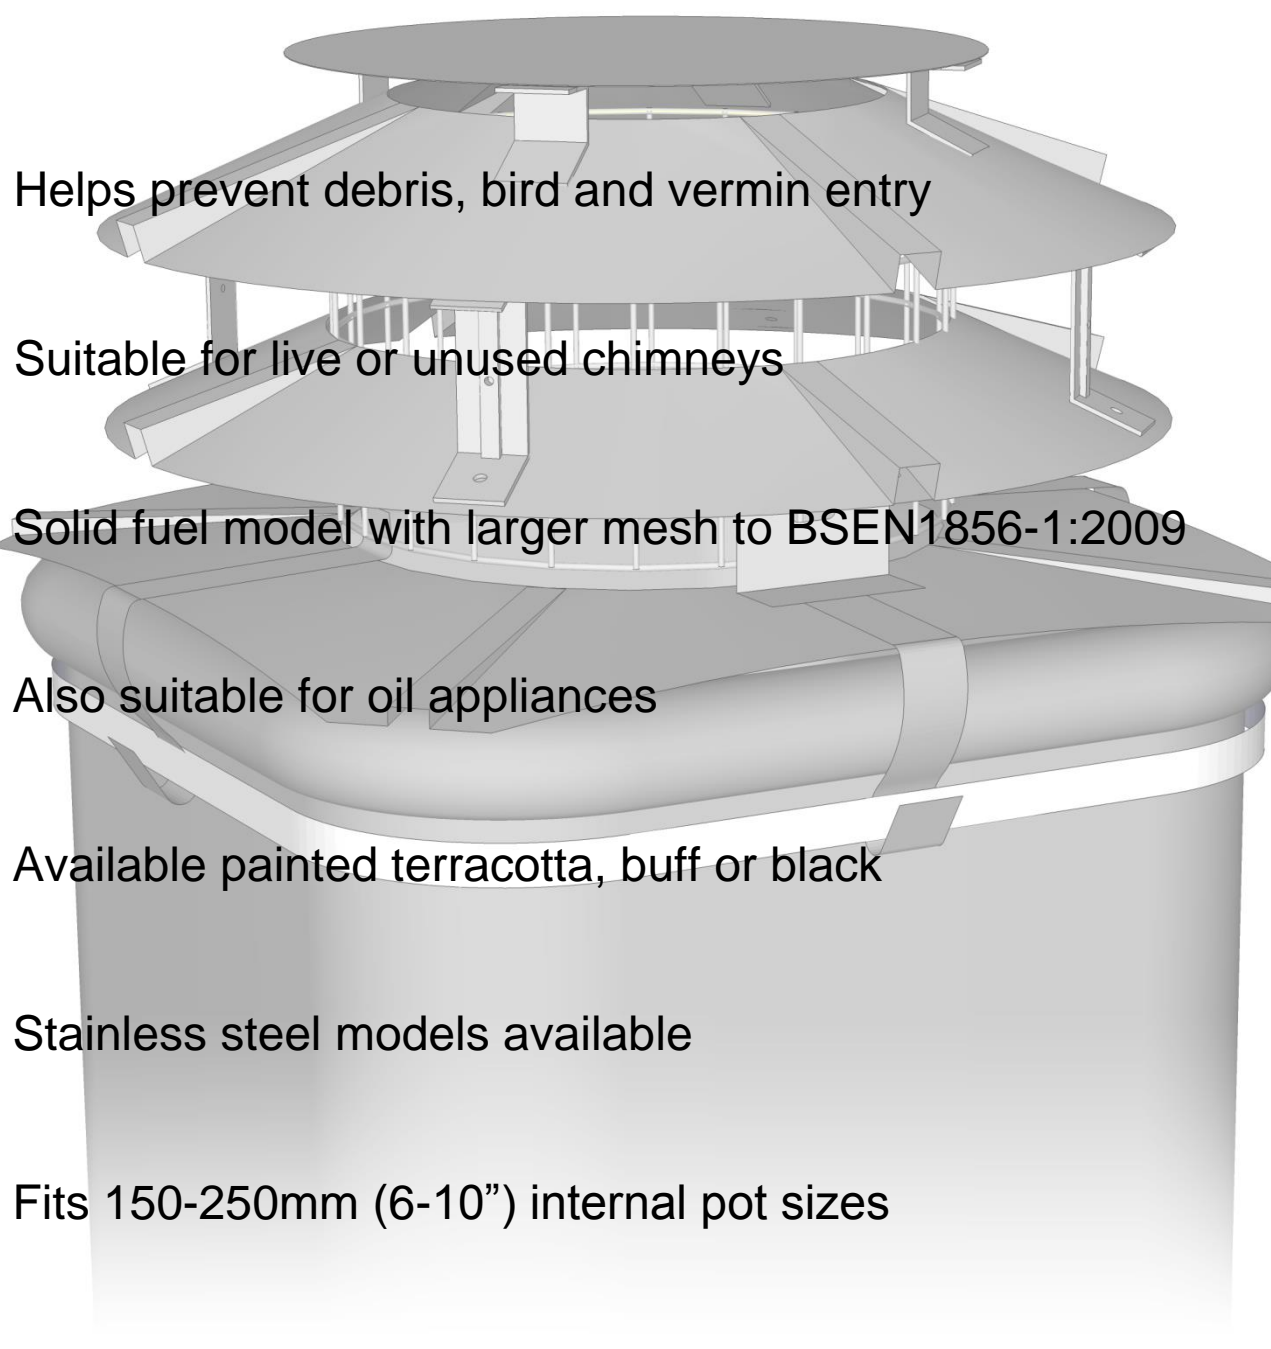


Brewer Square Ultimate Flue Outlet (Solid Fuel Model) Fitting Instructions

The antidowndraught chimney cowl for solid fuel and oil appliances

- 
- Helps prevent debris, bird and vermin entry
 - Suitable for live or unused chimneys
 - Solid fuel model with larger mesh to BSEN1856-1:2009
 - Also suitable for oil appliances
 - Available painted terracotta, buff or black
 - Stainless steel models available
 - Fits 150-250mm (6-10") internal pot sizes
 - Simple, fast and secure fitting
 - Other sizes plus square and special shapes, made to order

Ensure you have the correct model of terminal to match your fuel type and application.

To fit the U.F.O.

1. With the U.F.O. unpacked (Fig1), bend the legs outwards (Fig2).
2. Place the U.F.O. centrally on the chimney pot (fig3).
3. Bend the legs down the outside face of the chimney (Fig3).
4. Pass the stainless steel band around the legs (preferably under a ridge in the pot) (fig 3).
5. Tighten the stainless steel band with a flat bladed screwdriver until the U.F.O. is secure.
6. Bend bottom of legs back upwards over the stainless steel band and trim if necessary (Fig4).

Never install the unit with the top of the chimney or any other object positioned inside the central area of the mesh. This area must be kept clear to allow products of combustion to escape (fig 5).

Fig1

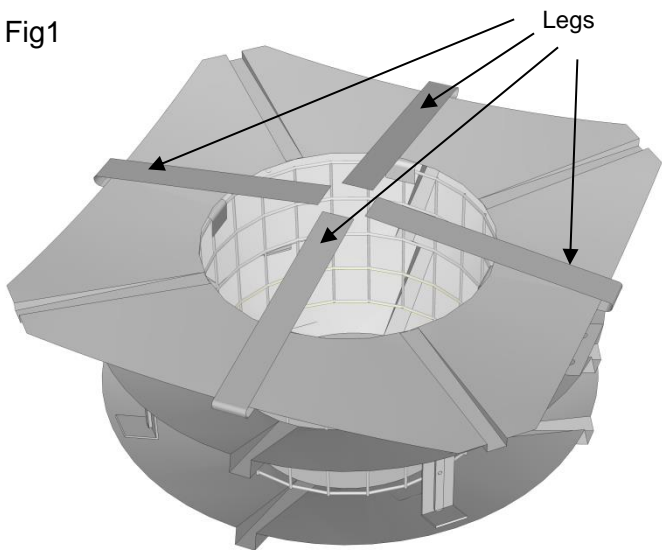


Fig2

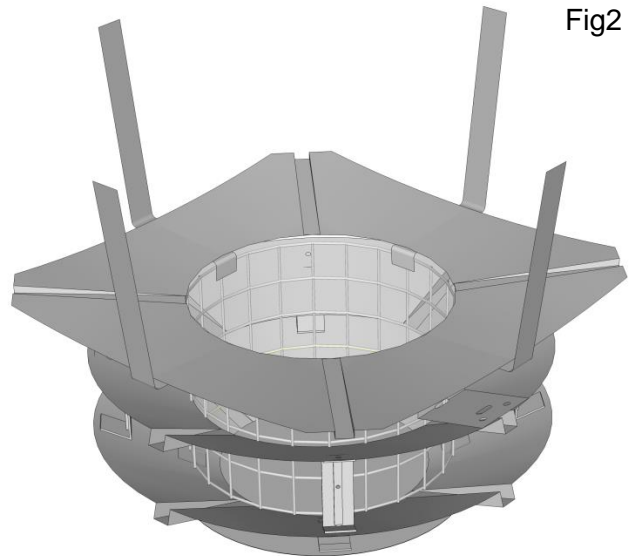


Fig3

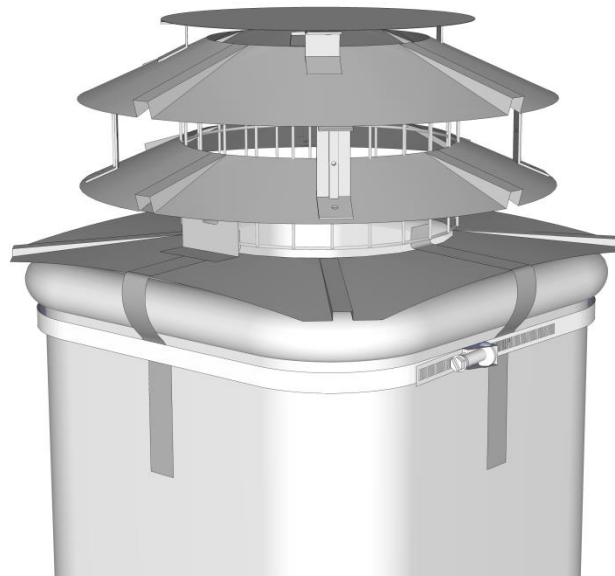


Fig4


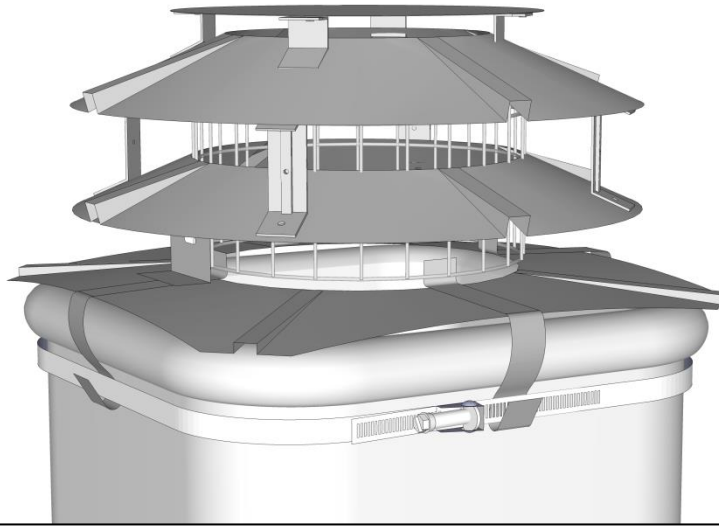


Fig5

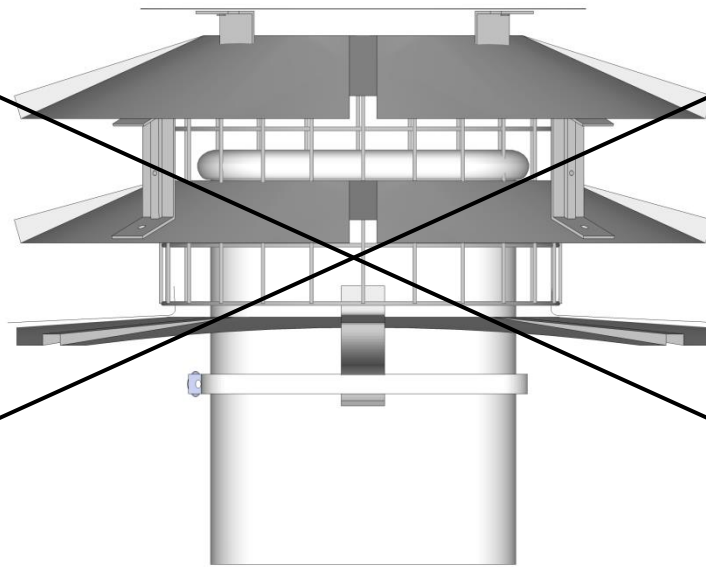

Declaration of conformity

Brewer Metalcraft Ltd
Units C&D Ford Lane Industrial Estate
Ford (Near Arundel)
West Sussex BN18 0DF
United Kingdom

13

1856-1:2009 Chimneys - Requirements for metal
chimneys - Part 1: System chimney products

Metal system chimney fitting - Terminal

| Essential Characteristic | Performance |
|-----------------------------|---------------|
| Flow resistance Coefficient | ζ 0.150 |
| Durability: Freeze thaw | Pass |

Technical information

| | |
|---|----------------------|
| Model | Ultimate Flue Outlet |
| Fitting range (internal chimney diameter) | 150-250mm |
| Coefficient of flow resistance | ζ 0.150 |