



# TapcoSlate Classic is made of pure virgin resins fortified with limestone and state-ofthe-art UV stabilisers so that your roof performs as good as it looks! NAIL / CLAVO Our products are modeled from actual slate and hand-split shake for natural, non-repeating beauty.

BEHIND THE BEAUTY IS PURE

Mother Nature's fury is universal, always presenting challenges to the exterior of your home.

With the damaging effects of sun, hail, gale-force winds, object impacts and freeze-thaw cycles, roofing materials are at odds with the weather all-year-round. The unique composite construction of TapcoSlate Classic and DaVinci Select Shake outperforms both natural slate and cedar shake with British & European Standard Fire Ratings, the highest Class 4 Impact Rating and 110 mph Wind Resistance. But the real genius lies in their ability to provide lasting beauty and a constant source of pride for both homeowner and contractor.


Unlike competitors, our state-of-the-art, composite tiles are made from virgin resins, which gives us the greatest degree of colour control and consistency in the manufacturing process... we know just how they will perform on your roof, at any time. This is why we can offer such a long 40-year warranty!

Being made from virgin resins makes our tiles, at the end of their very long lifecycle, 100% recyclable.

beauty made to last!

#### **VS. NATURAL SLATE**

Natural Slate tiles, along with clay and concrete, are not immune to the ravages of time... Its tiny fissures make natural slate susceptible to damage by freeze-thaw cycles as well as impact from objects including hail, branches and other solid objects. TapcoSlate Classic defies these elements, giving decades of enduring and worry-free beauty.

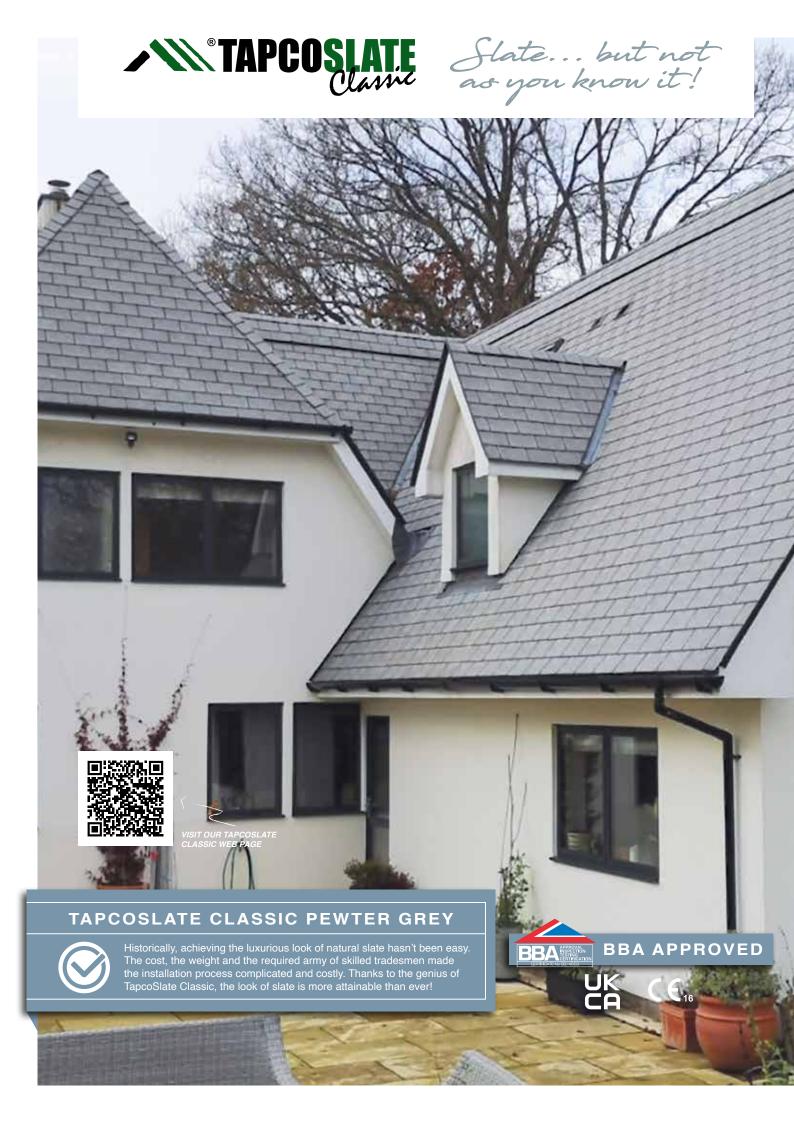




## Tapeo Slate Classic is ideal for:






Shake ... without the maintenance!

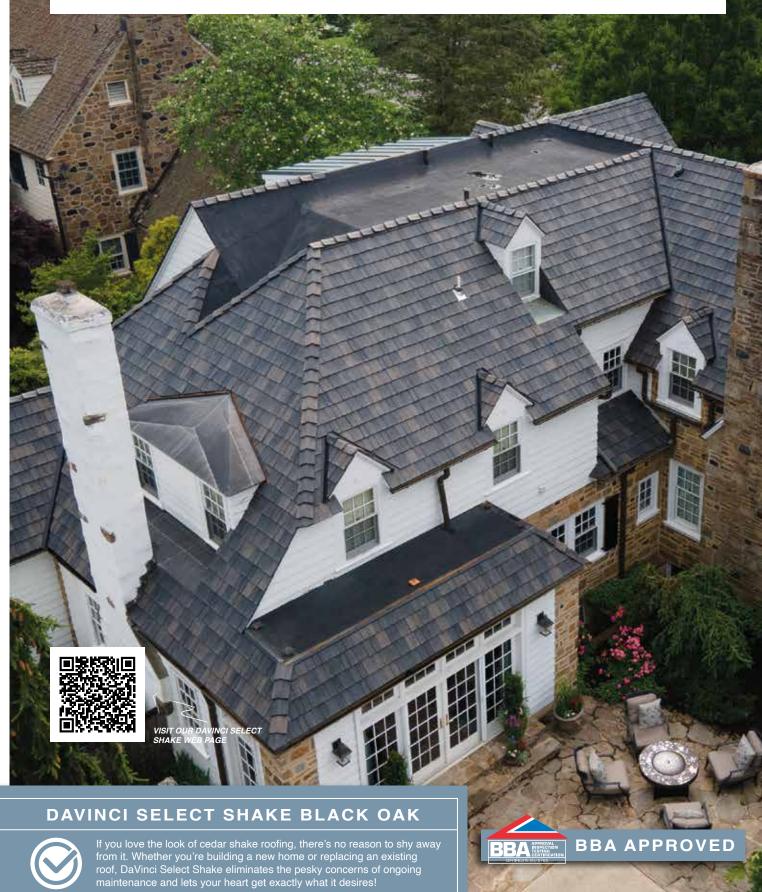



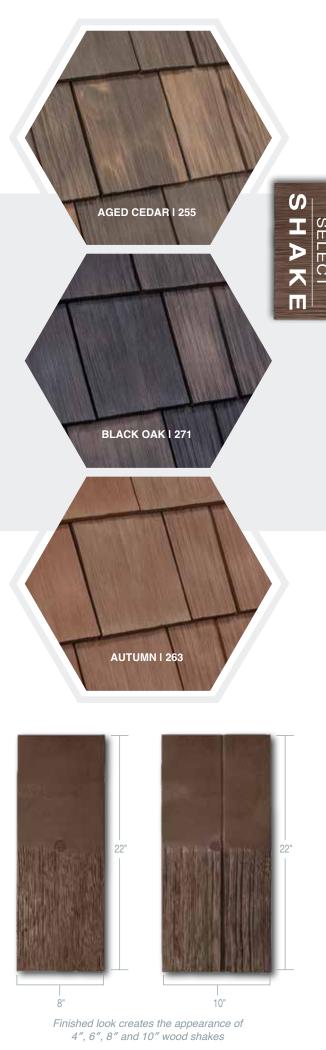

# mplete PACKAGE

Complete your roofing project, big or small, with our range of specialised accessories built for enhanced performance.















Classic Slate Edwardian Conservatory Hip End Cap





Classic Slate Victorian Conservatory Hip End Cap





Classic Slate 2M Length Dry Verge





Select Shake Ridge & Hip Cap



Select Shake Starter Tile



Select Shake 2M Length Dry Verge



Finish your "roofing puzzle"

with Tapco Roofing Products

accessories, hand-picked to

beatifully complement our

TapcoSlate Classic or DaVinci

Select Shake tiles.







Dry Verge Joining Clip Universal for Both Dry Verge Sizes





Stone Black (801) Pewter Grey (804)

Red Rock (809) Olive Green (814)

Plum (706) Brick Red (709) Chestnut Brown (712) Coachman Mix (790)





Black (Base Colour)



## Ventilation, membrane & fixings




Classic Slate Inline Vent 10.000mm<sup>2</sup>/m Ventilation

- COLOUR -



Classic Slate Inline Vent Adapter (110mm Round Pipe)



Cowl Vent 10,000mm<sup>2</sup>/m Ventilation



Cowl Vent Adapter (110mm Round Pipe)











RidgeMaster Plus Ridge Ventilation System 10,000mm²/m Ventilation (Each Side)



HipMaster Hip Ventilation System 10,000mm²/m Ventilation (Each Side)





Eaves Ventilation Kits 6m Length for Hot & Cold Roof Systems



Roofing Nails & Screws for All Applications



Continuous Abutment Ventilator 5,000mm²/m Ventilation

COLOUR -



Protect Wunderlay Impermeable Roofing Membrane



Protect VP300 Permeable Roofing Membrane

# Mhy Choose

#### **TAPCOSLATE CLASSIC & DAVINCI SELECT SHAKE?**

Both products have been tested above and beyond UK and EU construction standards, with certification from:







European Technical Assessment

Intertek Product Testing and Certification

### warringtonfire





The Building Research Establishment





Both products achieve a BROOF(t4) designation in accordance with EN 13501-5 & equivalent BS476-3 fire rating for full UK & EU compliance. These results mean no restrictions to boundary construction.



Achieve an EN 15601 rating for wind-driven rain at 12° & 14° for TapcoSlate Classic and at 15° for DaVinci Select Shake. These results mean that wind-driven rain will not penetrate at the above pitches.



Achieve the highest Class 4 UL 2218 Impact Test rating during testing performed with various sized heavy steel balls simulating 90-mph hailstones of varying sizes dropped from a 4 metre height.



Testing to ASTM G 155-05a 2,000 hours of super-intense xenon arc light and ASTM D638-03 tensile properties found no evidence of cracking, crazing, pitting, chalking, discolouration or any other material changes.



Achieve a Miami Dade TAS-110 rating of withstanding up to 110mph winds during testing with no tiles becoming detached or broken during 5 test cycles lasting 30 miniutes each at maximum velocity.



Our products are lightweight, which is ideal for structures needing a light footprint or with older timbers that cannot take heavier-weight roofing tiles. TapcoSlate can weigh as little as 12kg/m<sup>2</sup> & Select Shake as little as 14kg/m<sup>2</sup>



TapcoSlate has been tested on roof pitches of as low as 12° on both felt & batten and fully-boarded roofing applications. Select Shake has been tested to 15°. Both of which is vastly lower than their natural counterparts.



Our products can be easily scored with a standard utility knife and snapped down the line, or can be cut and shaped with a standard plastics saw, circular saw or power jigsaw, whatever you have handy at the worksite.



Recycled materials are notoriously unstable, and that's why we manufacture our products from 100% PURE VIRGIN resins, so that we know **EXACTLY** how our slates will perform over time! This also makes them 100% recyclable.



TapcoSlate and Select Shake are not like their brittle natual counterparts, they will not crack, split or break if dropped and can be walked upon with soft-soled footware without damage. They are both highly impact resistant to striking objects!



And let's not forget our incredible 40-year warranty! The warranty is automatically applied as soon as your roof tiles are delivered to site, so you can sit back, relax, and know that your roof slates and shake are fully covered! Tapco Roofing Products has the confidence to stand by the quality of the products we manufacture... we've been manufacturing DOWNLOAD OUR for the construction industry since 1961, so we'll always be here if you need us.



## Product TECHNICAL SPECIFICATIONS

### TAPCOSLATE

#### Coverage

PITCH	EXPOSURE	SLATES PER M <sup>2</sup>
12° to 25°	6" (152mm)	22
25° to 27.5°	6.5" (165mm)	20
27.5° to 30°	7" (178mm)	19
30° to 70°	7.5" (191mm)	18









**FIXING** 

WEIGHT

**FIXING** 

### Specifications

WEIGHT	Slate and Ridge/Hip Cap: 0.7kg
WEIGHT M <sup>2</sup>	Min. 12kg / Max. 15kg
PACKAGING	Pallet: 1600 slates (1.04 tonnes), Bundle: 25 slates (16.25 kg)
ROOFING BOARD	18mm thick OSB or Ply
BATTEN SIZE	Min. 2" x 1" (50mm x 25mm) treated battens
PITCH	Min. 12° / Max. 70°
SEALANT	A Butyl-based sealant should be used. Use of a Silicone sealant may invalidate your warranty
ADHESIVE	PERMABOND® TA4610 or TA4620 adhesive for Polypropylene compounds is recomended for use on constructing accessories but should not be used to fix the

tiles or caps to the roof

Large 10mm diameter head, galvanised 1.2" (30mm) by 0.1" (2.5mm) steel nails or 1.2" (30mm) by 0.14" (3.5mm) outdoor Phillips bugle screws (using hammer/screwdriver or nail/screw-gun). Longer 2" (50mm) nail or outdoor Phillips bugle screw required for fixing ridges and hips. Corrosion resistant fasteners are always recommended, especially in coastal areas. In Scotland we recommend the use of Stainless Steel nails for fixing. For nail guns, a minimum of 7.1mm diameter

nail heads should be used, we recommend Bostitch CR3DGAL Galvanised Roofing Coil Nails (32mm long with a large 10mm head), which fit most nail guns.

8" Shake: 0.6kg / 10" Shake: 0.8kg / Ridge/Hip Cap: 1kg

### SELECT SHAKE

PITCH	15° to 70°
EXPOSURE	Straight Tile Effect Min. 9" (230mm)
	Staggered Tile Effect Min. 10" (254mm)
SHAKE M <sup>2</sup>	20 Shake Tiles per Square Metre
CAPS M <sup>2</sup>	3.3 Ridge/Hip Caps per Linear Metre









### Specifications

WEIGHT	o Shake. 0.0kg / 10 Shake. 0.0kg / hiuge/hip Cap. 1kg
WEIGHT M <sup>2</sup>	14kg
PACKAGING	Pallet: 1056 tiles (933kg) - 48 Bundles. Bundle: 22 tiles (19.42kg) - pack size evenly split = 11 x 8" and 11 x 10" tiles.
ROOFING BOARD	18mm thick OSB or Ply
PITCH	Min. 15° / Max. 70°
SEALANT	A Butyl-based sealant should be used. Use of a Silicone sealant may invalidate your warranty
ADHESIVE	An adhesive for Polyethylene compounds is needed, PERMABOND® TA4605 or TA4610 is recommended (TA4605 is an instant bond whereas TA4610 allows a bit more time for bonding larger surfaces). Infinity Bond MMA 500 is an alternative compound to use. Should not be used to fix the tiles or case to the roof.

more time for bonding larger surfaces). Infinity Bond MMA 500 is an alternative compound to use. Should not be used to fix the tiles or caps to the roof.

Large 10mm diameter head, galvanised 1.2" (40mm) by 0.1" (2.5mm) steel nails (using hammer or nail-gun). Longe

0.1" (2.5mm) steel nails (using hammer or nail-gun). Longer 2" (65mm) nails are required for fixing ridges and hips. Corrosion resistant fasteners are always recommended, especially in coastal areas. In Scotland we recommend the use of Stainless Steel nails for fixing. For nail guns, a minimum of 7.1mm diameter nail heads should be used, we ideally recommend Bostitch CR3DGAL Galvanised Roofing Coil Nails with a large 10mm head.




We take our commitment to the architectural community very seriously, and have a host of architectural resources available on our website, including CAD, BIM and links to our Product Specifications available on NBS Source and SpecifiedBy. We run an active Continuing Professional Development (CPD) programme and can also help with any product and accessory VIEW OUR ARCHITECTURAL queries, including ventilation, roof structure requirements and quantity takeoffs.











That's why here at **Tapco Roofing Products** we strive, through technological innovation, to bring you atistically beautiful, authentic and extremely durable roofing that not only looks good for that all-important kerb appeal, but will also withstand anything that mother nature throws at it... for a very long time!

Tapco Roofing Products is part of the Westlake Royal Building Products™ family, a worldwide leader in the manufacturing of a broad and diverse range of exterior and interior building products and accessories.









#### LOOKING FOR ASSISTANCE?

We're ready to help.

If you have any questions, feel free to contact us directly.

A **Tapco Project Specialist** will answer any questions you might have concerning products, roof quantity take-offs, color selection, project timing, advice on contractor selection and help with local building authority questions.

**+44 (0)1482 880478** 

TAPCOROOFINGPRODUCTS.COM | INFO@TAPCOSLATE.COM
















TRP01-08-2023



