


**Mardome Contents**

**i** Please unpack and check that all correct parts are included and undamaged.

Opening Mardome Trade Dome for Builders Upstand




Opening Mardome Trade Dome with PVC Kerb



**⚠** DO NOT UNPACK THE ROOFLIGHT UNTIL IT IS READY TO BE INSTALLED

With this assembly, you will receive:  
**Dome Fixings**



**Fixing Quantities**

Length of Nominal Dome Side (mm)	Number of fixings per side
600, 750	2
900, 1050, 1200	3
1350, 1500, 1650	4
1800, 1950	5
2100, 2250	6
2400	7

(All fixings supplied in packs of 5.)

**Installation Instructions**

**a** Carefully place dome squarely on top of the hinge frame.

**⚠** **ONLY** use the fixings supplied!

**⚠** **DO NOT** over drive fasteners!

**b** Fix the dome to the hinge frame.


Use the supplied dome fasteners through the metal washer (if supplied) and the pre-fitted fastener buttons.

The Dome is fully secured to the hinge frame as soon as fastener buttons are gripped to the dome and do not spin by hand.

**c** Fit fastener caps to each pre-fitted fastener button, ensuring that the key-way is aligned as shown below.



**Mardome Installation**

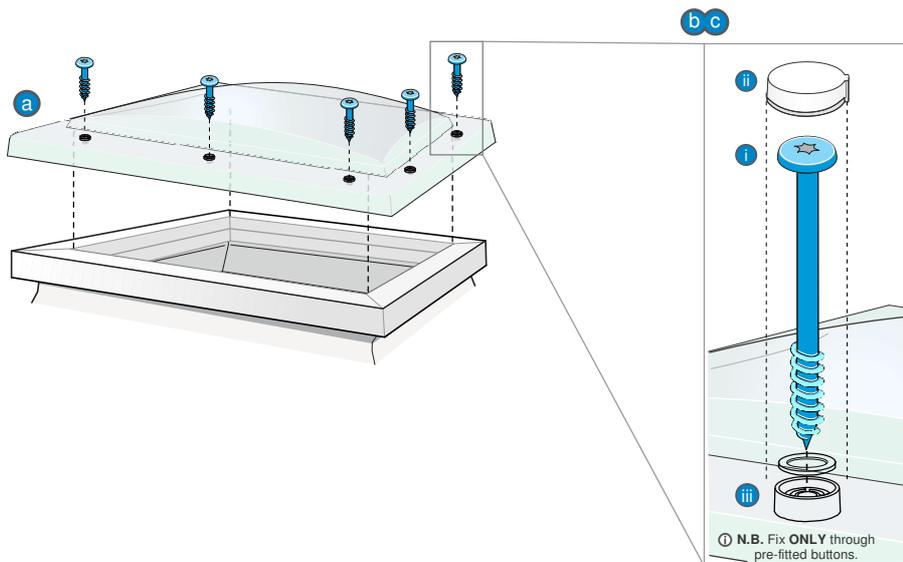

**Ⓞ TECHNICAL SUPPORT:** For any technical information/queries please contact your supplier.

Brett Martin Daylight Systems operates a policy of continuous product improvement, and reserves the right to alter specifications at any time without notice. Every effort has been taken to ensure all details contained in this document are correct at the time of going to press but this document should be used only as a guide and does not in any way form part of a contract or warranty. It is the customer's responsibility to ensure that the product is suitable for the actual conditions of use, which are beyond the control of Brett Martin Daylight Systems.