


## ONDULINE® VERGE-RIDGE B100

### Product characteristics

Length	L	100 cm
Width at 0°	w	40,5 cm
Flat width	Fw	3,0 mm
Height of accessory	H	NA
Thickness	t	3,0 mm
Surface		0,41 m <sup>2</sup>
Weight		1,08 kg
Weight per m <sup>2</sup>		2,7 kg/m <sup>2</sup>

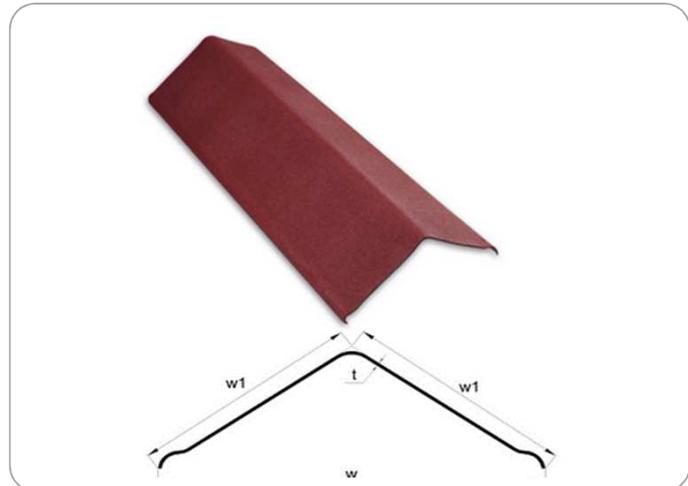

### General information

#### ► Application field

Lightweight bitumen accessory designed for all buildings covered with ONDULINE® roofing system to provide a weatherproof seal at the ridge and at the verge.

#### ► Material description

Bitumen material reinforced with cellulosic fibers and thermosetting resin. The composite is colored with inorganic pigments.

#### ► Color range:

Red	
Green	Brown
Autumn red	Black
	Cedar green

#### ► Installation

Special conditions of installation are required. Refer to the installation guide.

#### ► Tariff custom code

HS: 68079000

### Technical data

#### ► Mechanical & physical properties

Tearing strength	≥ 200 N
Water impermeability	Pass <sup>1</sup>
Proportion of bitumen	> 40%
Homogeneity	Pass <sup>2</sup>
Water absorption	< 20%

<sup>1</sup>No drop of water underneath sheet after 48 hours

<sup>2</sup>No area larger than 1 cm<sup>2</sup> without bitumen

#### ► Durability

Water impermeability after ageing	Pass <sup>1</sup>
Tearing strength after ageing	≥ 200 N
Thermal coefficient	< 100.10-6 1/K

#### ► Fire performance

Reaction to fire - EN 13501-1	E
-------------------------------	---