
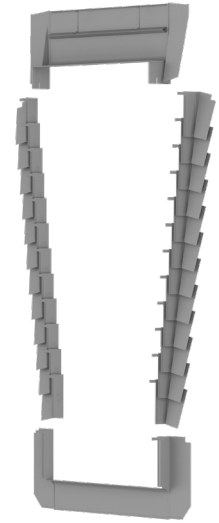


TECHNICAL SPECIFICATION

TFP

PLAIN TILE FLASHING

0-28 mm (2x14 mm)



FEATURES

- Perfect watertightness
- Easy installation
- Weather and UV ray resistant
- Split side piece
- Lead free
- Without apron to ensure a perfect seal to flat roofing materials



APPLICABLE

- In roof pitch range of 25-90°
- Plain tiles profile height 0-28 mm (2x14 mm), max. length 340 mm

MATERIAL

- Aluminium
- Powder coated grey, RAL 7043

FLASHING SELECTION GUIDE

WINDOW SIZE CODE	FLASHING CODE
C2A	TFP C2A
C4A	TFP C4A
F6A	TFP F6A
M4A	TFP M4A
M6A	TFP M6A
M8A	TFP M8A
S6A	TFP S6A