


SFX

SLATE FLASHING



FEATURES

- Perfect watertightness


- Easy installation

- Weather and UV ray resistant

- Lead free

- Split side parts

- Without apron to ensure a perfect seal to flat roofing materials

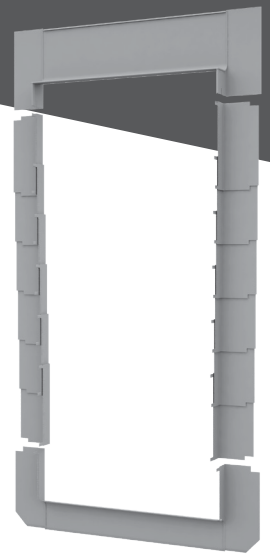

APPLICABLE

- In roof pitch range of 15-90°

- Slate profile height 0-16 mm (2x8 mm)

MATERIAL

- Aluminium

- Powder coated grey, RAL 7043

FLASHING SELECTION GUIDE

WINDOW SIZE CODE	FLASHING CODE
C2A	SFX C2A
C4A	SFX C4A
F6A	SFX F6A
M4A	SFX M4A
M6A	SFX M6A
M8A	SFX M8A
S6A	SFX S6A