
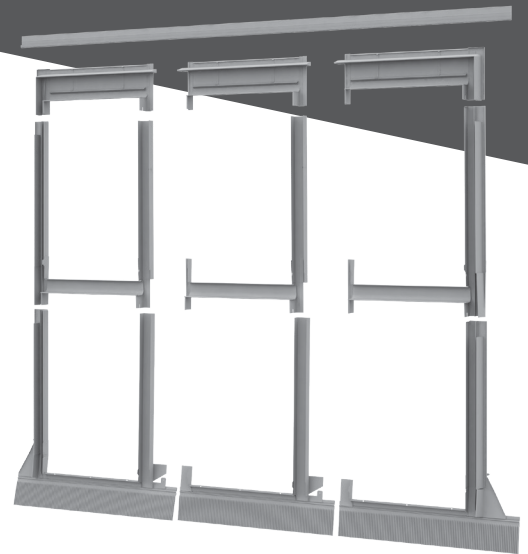


### UCX

#### UNIVERSAL COMBI FLASHING



#### FEATURES

- Perfect watertightness
- Easy installation
- Weather and UV ray resistant
- Lead free
- Foam gasket
- Extra long apron ensures a perfect seal to high profiled roofing materials



#### APPLICABLE

- In roof pitch range of 15-90°
- Tile profile height 16-120 mm

#### MATERIAL

- Aluminium
- Powder coated grey, RAL 7043

#### FLASHING SELECTION GUIDE

UCX	13	2	46'	5'	7'
E: 100mm Horizontal distance between the windows	UCX C2A 13E	UCX C2A 2E	UCX C2A 46EE	UCX C2A 5EE	UCX C2A 7E
	UCX C4A 13E	UCX C4A 2E	UCX C4A 46EE	UCX C4A 5EE	UCX C4A 7E
	UCX F6A 13E	UCX F6A 2E	UCX F6A 46EE	UCX F6A 5EE	UCX F6A 7E
	UCX M4A 13E	UCX M4A 2E	UCX M4A 46EE	UCX M4A 5EE	UCX M4A 7E
	UCX M6A 13E	UCX M6A 2E	UCX M6A 46EE	UCX M6A 5EE	UCX M6A 7E
	UCX M8A 13E	UCX M8A 2E	UCX M8A 46EE	UCX M8A 5EE	UCX M8A 7E
UCX S6A 13E	UCX S6A 2E	UCX S6A 46EE	UCX S6A 5EE	UCX S6A 7E	
F: 120mm Horizontal distance between the windows	UCX C2A 13F	UCX C2A 2F	UCX C2A 46FE	UCX C2A 5FE	
	UCX C4A 13F	UCX C4A 2F	UCX C4A 46FE	UCX C4A 5FE	
	UCX F6A 13F	UCX F6A 2F	UCX FE6A 46FE	UCX FE6A 5FE	
	UCX M4A 13F	UCX M4A 2F	UCX M4A 46FE	UCX M4A 5FE	
	UCX M6A 13F	UCX M6A 2F	UCX M6A 46FE	UCX M6A 5FE	
	UCX M8A 13F	UCX M8A 2F	UCX M8A 46FE	UCX M8A 5FE	
UCX S6A 13F	UCX S6A 2F	UCX S6A 46FE	UCX S6A 5FE		
G: 140mm Horizontal distance between the windows	UCX C2A 13G	UCX C2A 2G	UCX C2A 46GE	UCX C2A 5GE	
	UCX C4A 13G	UCX C4A 2G	UCX C4A 46GE	UCX C4A 5GE	
	UCX F6A 13G	UCX F6A 2G	UCX F6A 46GE	UCX F6A 5GE	
	UCX M4A 13G	UCX M4A 2G	UCX M4A 46GE	UCX M4A 5GE	
	UCX M6A 13G	UCX M6A 2G	UCX M6A 46GE	UCX M6A 5GE	
	UCX M8A 13G	UCX M8A 2G	UCX M8A 46GE	UCX M8A 5GE	
UCX S6A 13G	UCX S6A 2G	UCX S6A 46GE	UCX S6A 5GE		

\*: 100 mm vertical distance between the windows

