



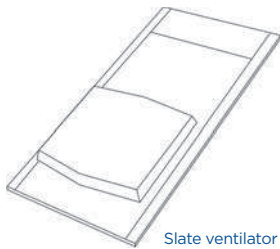


Universal slate ventilator

Ideal for new build and existing roof applications

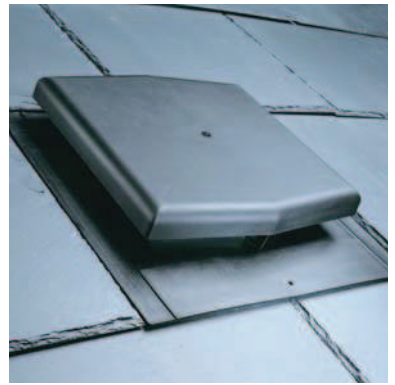

Slate ventilator 4001



Pipe adaptor kit 4101

Use

- For replacement of one normal roof slate to provide a ventilator
- Ventilating a roof space at low level or high level
- Connection to mechanical extraction from kitchen/bathrooms
- Ventilation outlet for soil vent pipe

Features and benefits

- Free vent area of 10,000mm²
- Suits slate sizes 610mm x 305mm or 510mm x 255mm
- Inconspicuous low hood design
- Can be combined with pipe adaptor kit to enable connection of 100mm soil vent pipe and/or mechanical extractor

Quality

- Manufactured to BS EN ISO 9001 and BS EN ISO 14001
- Satisfies all NHBC requirements
- Complies with all relevant Building Regulations
- Meets all relevant British Standards

Material and colour choice

- Manufactured from polypropylene
- Available in black

Products in the system

Slate ventilator - Product 4001

Provides free vent area of 10,000mm².

Pipe adaptor kit - Product 4101

Fits to the underside of the slate vent to allow a standard 100mm soil vent pipe to be connected, kit includes pipe adaptor, flexible PVC pipe and fixing tie.

Pipe adaptor only - Product 4102.

Flexible PVC pipe (500mm long) only - Product 4103.

Fixing tie only - Product 4104.

Installation advice

- When fixed at 1 metre centres and at a minimum of 1 metre up from the eaves, a ventilation property equivalent to a 10mm continuous air gap is achieved
- Use product as supplied for the larger slate option (610mm x 305mm)
- Cut product along guide lines for smaller slate option (510mm x 255mm)
- The ventilator replaces one normal slate

- The two roof slates directly beneath the ventilator must be cut to accommodate the felt penetration sleeve on the rear of the slate vent (cut away the minimum possible to achieve a tight fit using the slate ventilator as a template)
- Cut an X into the felt 200mm x 105mm at the point of the felt penetration sleeve, fold up/outwards the four triangular flaps to form an aperture 200mm x 105mm which will accommodate the sleeve, nail the top flaps over the battens
- Position the vent and nail into the batten through the nail slots provided
- Secure the front of the vent using a copper disc rivet
- Connect pipe adaptor kit to underside of slate vent if required

How to order

- Contact our Sales Department - Telephone 01405 765567

Bill of quantity

G20 Carpentry/Timber Framing/First Fixing

Clause

900* EAVES SOFFIT VENTILATORS

• Manufacturer: **Timloc Building Products, Rawcliffe Road, Goole, East Yorkshire, DN14 6UQ. Tel: 01405 765567, Fax: 01405 720479. Web: www.timloc.co.uk**

• Product Reference: **4001**

• Type: **Universal Slate Ventilator (610mm x 305mm)**

10mm Airflow

• Colour: **Black**

• Airway: Provide the equivalent of a continuous opening of not less than **10mm** for the full length of eaves.

• Optional Accessories:

e.g. 4101 Pipe Adaptor Kit (Black)

N5Plus

Product codes

Universal slate ventilator

Suits slate sizes of either 610mm x 305mm or 510mm x 255mm

Description	Colour/finish	Effective free area	Product code
Slate ventilator	Black	10,000mm ²	4001
Pipe adaptor kit	Black		4101
Pipe adaptor only	Black		4102
Flexible PVC pipe only	Grey	0.5mtr	4103
Flexible tie only	Black		4104