


Roll-Out Dry Ridge System - Ridge Union

CODE **GDRR-RU**

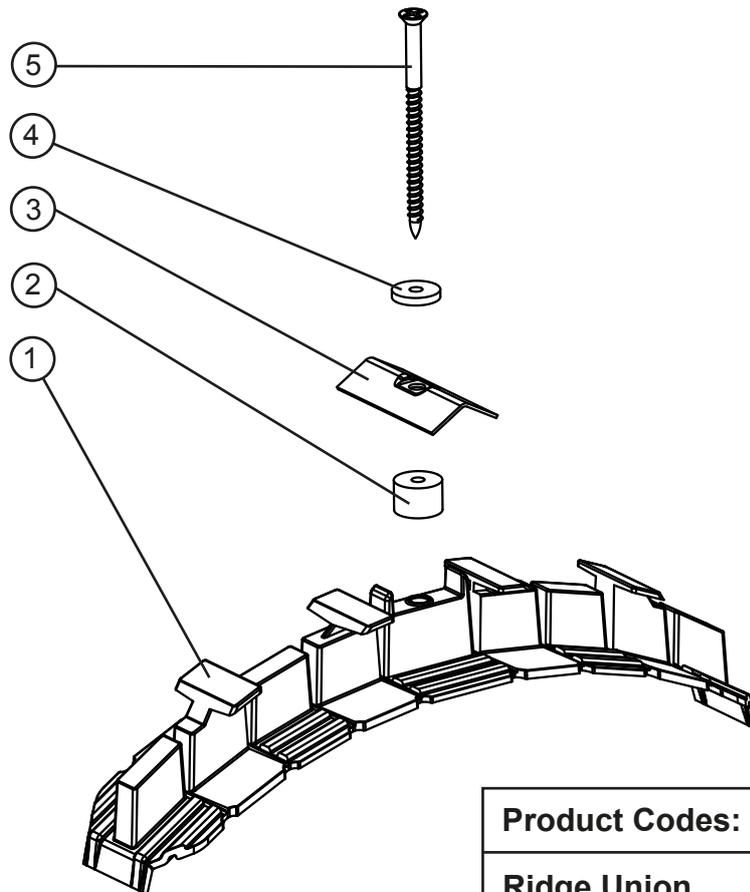

Product Codes:

Ridge Union

GDRR-RU

Description

The Ridge Union is made up of an assembly of parts, as shown in the diagram. The parts are as follows:

1. Ridge Union Body, injection moulded in UV stabilised polypropylene
2. Foam Washer, made from expanded polyethylene
3. Clamp, made from 304 grade stainless steel
4. Neoprene Rubber Washer
5. Countersunk Screw, made from 304 grade stainless steel

The Ridge Union is designed to sit in the gaps between each of the ridge tiles, holding them in place. The product slides onto the end of the ridge tile and is flexible so that it bends to the shape of the tile, both round and angled, and then the next ridge tile slots into the other side of the Ridge Union and this continues along the full length of the ridge. Once the ridge tiles are all correctly rested in place, the unions are secured by driving the countersunk screw, assembled with the washers and clamp, through the hole in the top and into the horizontal batten below. The screws should be tightened down so that the clamp presses down on the ridge tile securing it in position.

The Ridge Union forms part of Manthorpe's Dry Ridge System which can be purchased as a kit, with all the parts required to cover a run of approximately 6 metres.

MANTHORPE BUILDING PRODUCTS LTD
 MANTHORPE HOUSE
 BRITAIN DRIVE
 CODNOR GATE BUSINESS PARK
 RIPLEY
 DERBYSHIRE DE5 3ND

TEL: 01773 514 200
 FAX: 01773 514 262
 EMAIL:
 bpsales@manthorpe.co.uk
 WEB
 www.manthorpe.co.uk

DRN K.B.

Date 04/09/18

DRG No

Issue




The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

MBP 8266
 PAGE (1 OF 2)


E

Roll-Out Dry Ridge System - Ridge Union

CODE **GDRR-RU**

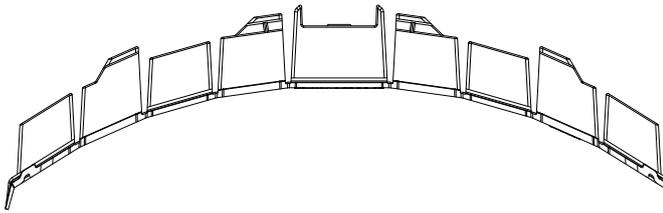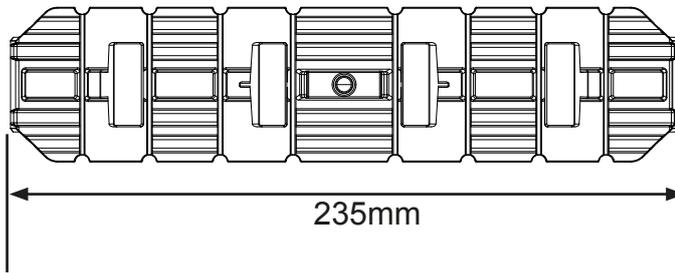

Fixing:

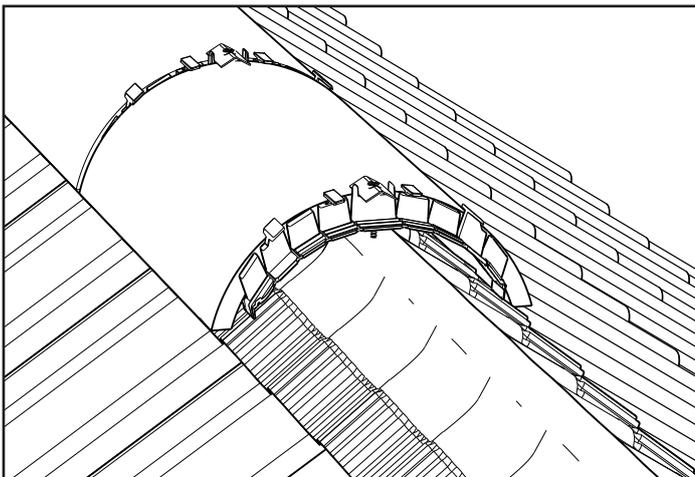

Roof Pitch Compatability	15° to 45° Pitch
Weight	0.066 kg each
Packaging	13 per roll-out system 12 per additional pack
Materials	UV Stabalised Polypropylene
Manufacturing Process	Injection moulded
Colour Variations	Black (BL) 

References

BSI: British Standard 5534:2003
 BSI: British Standard 6399-2:1997
 BSI: British Standard 8612:2018
 NHBC Standards Chapter 7.2

BS 8612 Specifications

- Independently tested to conform with the requirements of BS 8612.
- Performance data for the tests conducted on this product is available upon request.

MANTHORPE BUILDING PRODUCTS LTD
 MANTHORPE HOUSE
 BRITAIN DRIVE
 CODNOR GATE BUSINESS PARK
 RIPLEY
 DERBYSHIRE DE5 3ND

TEL: 01773 514 200
 FAX: 01773 514 262
 EMAIL:
 bpsales@manthorpe.co.uk
 WEB
 www.manthorpe.co.uk

DRN K.B.

Date 04/09/18

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No

MBP 8266
 PAGE (2 OF 2)

Issue

E