



Sandstone Coping Stones Data Sheet

Sandstone Coping Stones

Product Name: Sandstone Coping Stones with pencil rounded edge and drip channels

Application: Wall coping / parapet protection

Stone Type: Natural Sandstone

Dimensions

Parameter	Specification
Length	600 mm
Width	150mm & 300 mm
Thickness	25mm
Edge Profile	Pencil rounded (bullnose) on exposed edges
Underside Detail	Continuous drip channels

Material Characteristics

Property	Description
Stone Composition	Natural sedimentary sandstone
Colour	Sagar Black, Mint & Kandla Grey
Surface Finish	Riven top surface
Edge Finish	Pencil rounded edge
Underside Finish	Sawn with machined drip grooves

Drip Channel Details

Feature	Specification
Quantity	2 longitudinal channels
Position	20mm from edge, parallel to long edges
Channel Width	Approx. 5mm
Channel Depth	Approx. 5mm
Function	Prevent water tracking onto wall face

Manufacturing Tolerances

Aspect	Tolerance
Length & Width	±3 mm
Thickness	±2 mm
Straightness	±2 mm over full length

Performance

Property	Typical Value
Density	2,200–2,400 kg/m ³
Water Absorption	≤6%
Frost Resistance	Suitable for exterior use
Durability	High – suitable for external exposure

Compliance & Suitability


- Suitable for external and internal use
 - Compatible with brick, block, and stone walls
 - Appropriate for residential and commercial projects
-

Maintenance

- Clean with mild detergent and water
 - Avoid acidic or abrasive cleaners
 - Re-seal periodically depending on exposure
-

Drawing

25 mm THICK

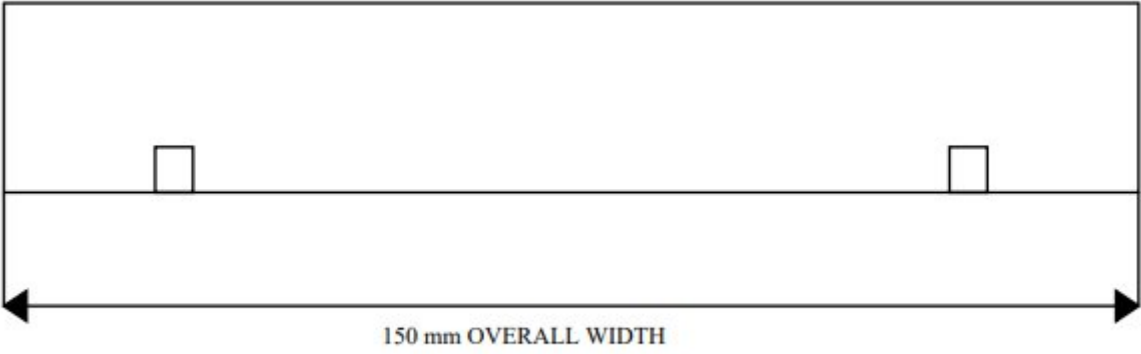

Drip channels: 20 mm from edge, 5 mm wide