





6m Roll Out Dry Fix Ridge System

Convenient '1 pack' mechanical fix solution for roof ridge installations.


Ridge batten brackets




Water resistant and air permeable ridge roll

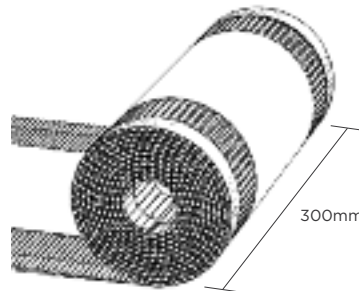

Ridge unions

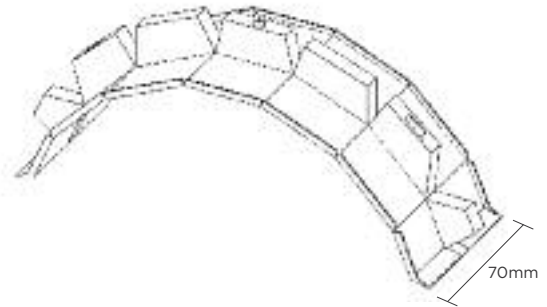


Ridge union clip




Countersunk wood fixing screws



Clamping plates

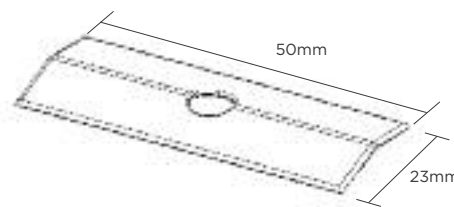

EPDM washers



Use


- Most types of slate, concrete or clay roof tiles
- Round or angled ridge tiles
- Most pitched roof types from 15-55°
- New build and retro-fit projects

Features and benefits

- Long lasting, reliable and virtually maintenance free
- Protects against wind uplift, water ingress and general deterioration
- Provides 5000mm²/m (5mm continuous) ridge ventilation
- Easy, fast, clean and generally safer mortar free installation
- Can be installed in virtually all wet and cold weather conditions
- Water resistant yet air permeable membrane roll
- Strong, malleable and corrosion resistant aluminium flashing secured to roll
- Generous 25mm self-adhesive bonding strip areas for easy and reliable bonding
- Extended slotted ridge bracket fixing points for ease and flexibility
- 70mm wide ridge union width provides additional water bar protection
- Assurance of stainless steel clamping plates
- Terracotta coloured ridge unions (terracotta packs only) for a colour coordinated finish
- Maintains consistently smart appearance
- Not impacted by building settlement
- Helps prevent entry of large insects, birds and vermin into the roofline

Quality

- Helping to meet:
 - BS 5534 Code of practice for slating and tiling
 - BS 5250 Code of practice for control of condensation in buildings
- Complies with all other relevant regulations and standards

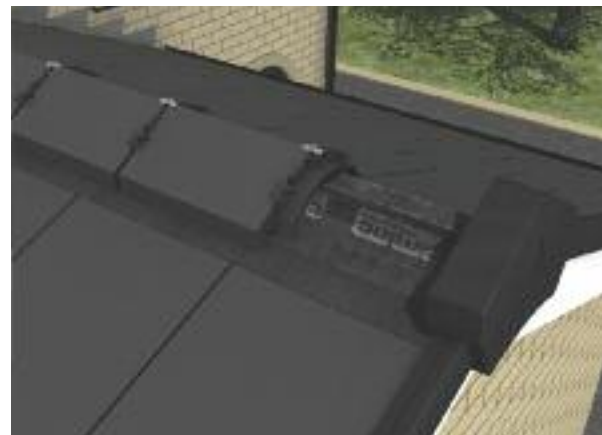

6m Roll Out Dry Fix Ridge System - Black



6m Roll Out Dry Fix Ridge System

Convenient '1 pack' mechanical fix solution for roof ridge installations.

Page 2 of 2

Material and colour choice

- Ridge unions and clips are manufactured from UV protected and colour fast polypropylene
- Water resistant and ventilated roll membrane with attached self-adhesive and coloured aluminium flashing
- Galvanised steel ridge batten brackets
- Stainless steel clamping plates and fixing screws
- EPDM rubber washers
- Available in black, terracotta or brown
 - black and brown packs are supplied with black ridge unions and clips
 - terracotta packs supplied with terracotta ridge unions and clips

Components supplied in the pack

- 10no. ridge batten brackets
- 1no. 6m water resistant and air permeable ridge roll
- 13no. ridge unions
- 26no. ridge union clips
- 13no. countersunk wood fixing screws
- 13no. clamping plates
- 13no. EPDM washers

Installation advice

Please refer to www.timloc.co.uk for our full recommended installation guidance.

How to order

Select the relevant 6m Roll Out Dry Fix Ridge System pack colour for the project.

Order 1 pack for roof ridge lengths up to 6m.

Sequential packs can be installed. Please allow for a minimal roll membrane overlap of at least 150mm.



6m Roll Out Dry Fix Ridge System - Terracotta

Product codes

Description	Colour	Product code
6m roll out dry fix ridge system pack	Black	44600
6m roll out dry fix ridge system pack	Terracotta	44601
6m roll out dry fix ridge system pack	Brown	44602